

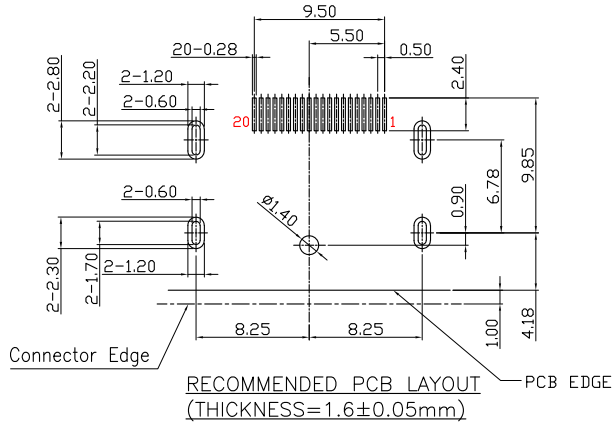





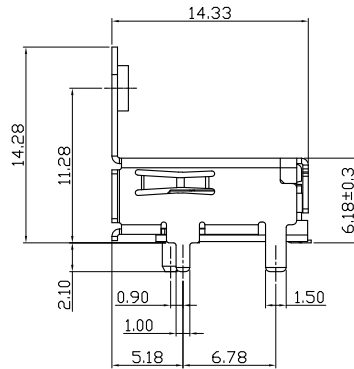

- MATERIALS:**
- 1. Housing: LCP (UL94 V-0), Black
 - 2. Cover: LCP (UL94 V-0), Black
 - 3. Contact: Brass
 - 4. Shell: Brass
- FINISH:**
- 1. Contact: Gold Flash Plated On Contact Area
Tin Plated On Solderails
Nickel Under Plated Over All
 - 2. Shell: Gold Plated
- SPECIFICATION:**
- 1. Current: 0.5A
 - 2. Voltage: 40V RMS
 - 3. Dielectric Withstanding Voltage: 500V AC/60S
 - 4. Contact Resistance: 30 mΩ Max.
 - 5. Insulation Resistance: 100MΩ Min. At 500V DC;
 - 6. Operating Temperature: -25°C to +85°C

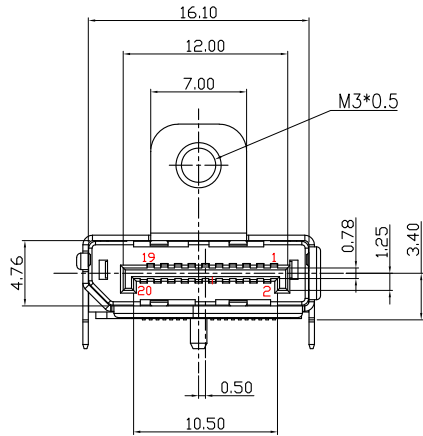

僅供參考

XIAN YI PRECISION CO., LTD.
祥益精密股份有限公司

TITLE / 品名: DP(2.1) 90度 SMD 直腳有柱 M3螺絲孔 H=11.28 Type-1 銅殼鍍金 (鐳雕UHBR20)

核準發行章

PART NO / 料號: DWF20U-11BG-78R5

APPROVE / 核准	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號
<i>Kin</i>	<i>Chenrong</i>	<i>Chenrong</i>	A-DP-016-00

UNIT / 單位	☉	◁
mm	SHEET 1	OF 1

NO.	REV / 版本	修訂內容	日期
△			
△			
△	1.0	圖面僅供參考, 實際尺寸以承認圖為主	2025/12/19