

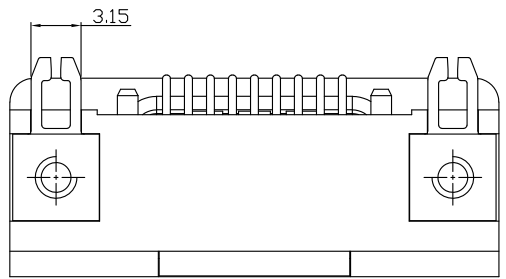

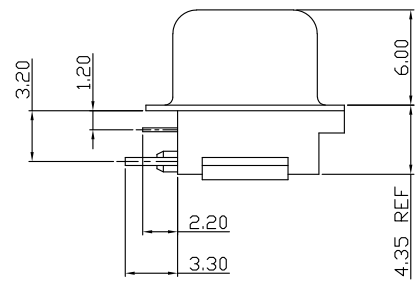



MATERIALS:
 1. Housing: PA66 (UL 94V-0), Green
 2. Contacts: Brass
 3. Shell: SPCC
 4. Rivet: Copper Alloy(Lead \leq 40000PPM)
 5. Board Lock: SPCC
 6. Screw: SPCC
 Or Copper Alloy(Lead \leq 40000PPM)

FINISH:
 1. Contacts: Gold Flash Plated on Contact Area
 Tin Plated on Solder-tails
 Nickel Under Plated Over All
 2. Shell: Nickel Plated
 3. Rivet: Nickel Plated
 4. Board Lock: Tin Plated
 5. Screw: Nickel Plated

SPECIFICATION:
 1. Current Rating: 2A
 2. Dielectric Withstanding Voltage: AC 500V
 3. Insulation Resistance: 1000M Ω Min. at DC 500V
 4. Contact Resistance: 30m Ω Max.
 5. Operating Temperature: -55°C to 105°C

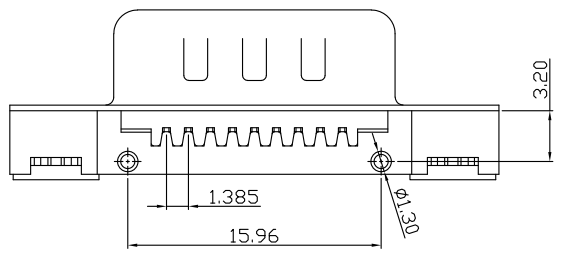

鉚合型

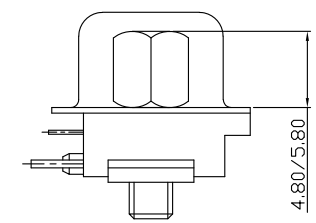

鉚合鎖螺絲型

僅供參考

XIAN YI PRECISION CO., LTD.
 祥益精密股份有限公司

TITLE / 品名: D-Sub 90度 二排 9公 沉板2.0 板邊距1.2 Dip Type (單排P)

核準發行章

PART NO / 料號: D40110-09M-RXXXX

APPROVE / 核準	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號	UNIT / 單位	☉	X
<i>Kin</i>	<i>Chenrong</i>	<i>Chenrong</i>	K-SM-002-00	mm	SHEET 1 OF 1	

NO.	REV / 版本	圖面僅供參考, 實際尺寸以承認圖為主	2025/12/19
		修訂內容	日期