





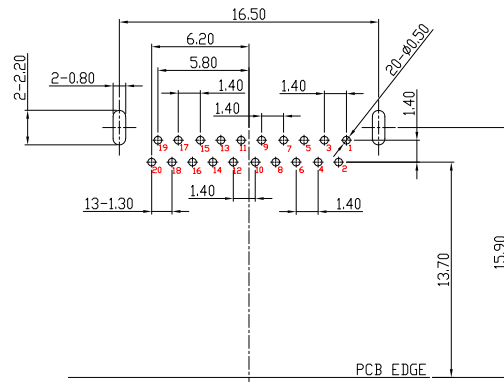


1. Housing: LCP (UL94 V-0), Black
2. Cover: LCP (UL94 V-0), Black
3. Contact: Brass
4. DP Shell: Stainless Steel
5. Rear Cover: Stainless Steel

1. Contact: Gold Flash Plated On Contact Area
Tin Plated On Solderails
Nickel Under Plated Over All
2. DP Shell: Nickel Plated

1. Current: 0.5A
2. Voltage: 40V RMS
3. Dielectric Withstanding Voltage: 500V AC/60S
4. Contact Resistance: 30 mΩ Max.
5. Insulation Resistance: 100MΩ Min. At 500V DC;
6. Temperature Range: -25°C to +85°C

Technical drawing of a 12-pin D-sub connector, front view. The drawing shows a rectangular connector with 12 pins on the bottom. Dimensions include overall width of 16.10, pin pitch of 1.25, and various mounting and pin dimensions. Callouts indicate hole diameters of 16.10 and 12.00. A total height dimension of 15.32 is shown on the right side.

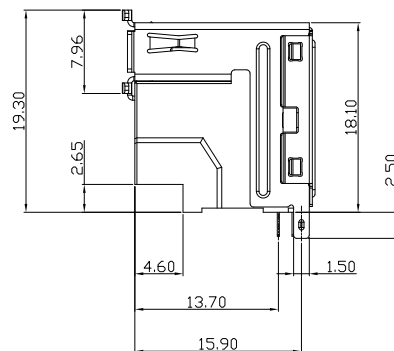

XIAN YI PRECISION CO., LTD.
祥益精密股份有限公司

PART NO /料號: PHC20L-11AN-61P0

僅供參考

核准發行章

APPROVE /核准

CHECKED / 審查

DRAWING / 繪圖

DRAWING NO /圖號

UNIT / 單位

SHEET 1 OF 1

3
2
1

1.0
EV / 版本

圖面僅供參考,實際尺寸以承認圖為主

2025/12/19

修訂內容