
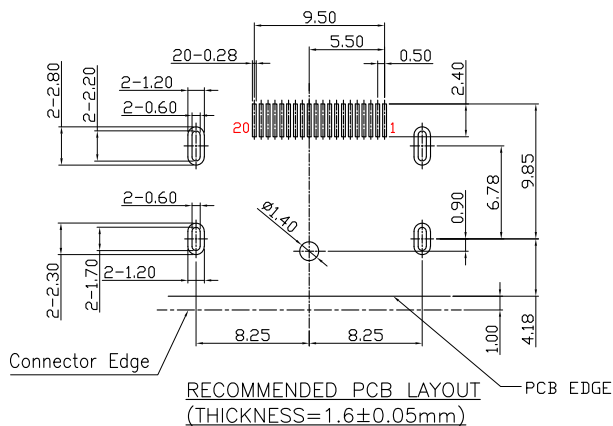




MATERIALS:





1. Housing: LCP (UL94 V-0), Black
2. Cover: LCP (UL94 V-0), Black
3. Contact: Brass
4. Shell: Brass

FINISH:

1. Contact: Gold Flash Plated On Contact Area
Tin Plated On Solder tails
Nickel Under Plated Over All
2. Shell: Nickel Plated

SPECIFICATION:

1. Current: 0.5A
2. Voltage: 40V RMS
3. Dielectric Withstanding Voltage: 500V AC/60S
4. Contact Resistance: 30 mΩ Max.
5. Insulation Resistance: 100MΩ Min. At 500V DC;
6. Operating Temperature: -25°C to +85°C

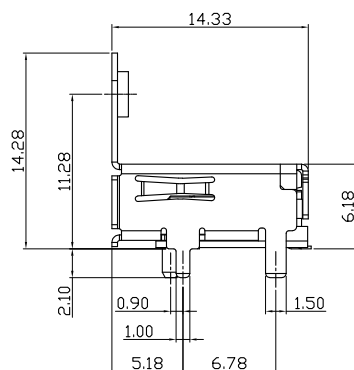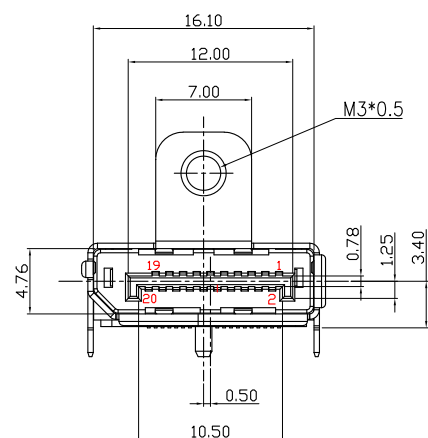


僅供參考

XIAN YI PRECISION CO., LTD.
祥益精密股份有限公司

TITLE /品名: DP(2.1) 90度 SMD 直腳有柱 M3螺絲孔 H=11.28

核準發行章

PART NO /料號：DWF20U-11BN-78R0



1.0

1.0	圖面僅供參考, 實際尺寸以承認圖為主
-----	--------------------

2025/12/19

修訂內容

日期

APPROVE /核准

CHECKED / 審查

DRAWING / 繪圖

DRAWING NO /圖號

UNIT / 單位

Kin

Chenrong

Chenrong

A-DP-015-00

mm

SHEET 1 OF 1

	NO

EV / 版本

修訂內容

日期