
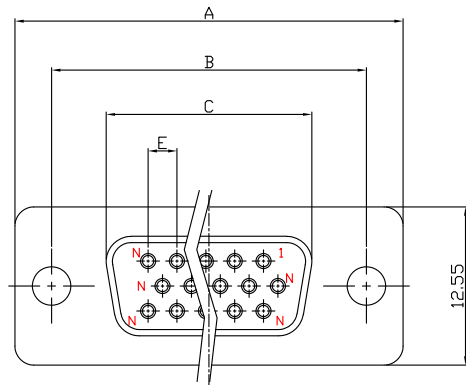
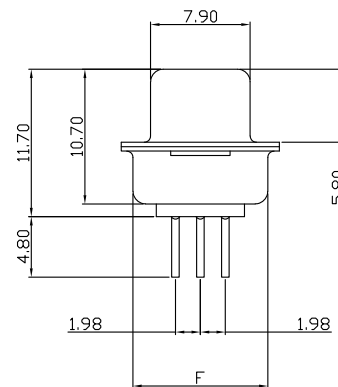


P.C.B. LAYOUT

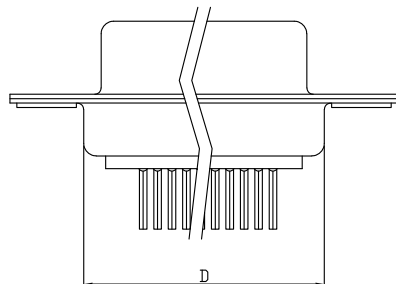

MATERIALS:

1. Housing: PBT (UL94 V-0), Black
2. Contacts: Brass
3. Shell: SPCC

FINISH:

1. Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
2. Shell: Nickel Plated

SPECIFICATION:

1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s.
3. Insulation Resistance: 5000MΩ Min. at DC 500V
4. Contact Resistance: 30mΩ Max.
5. Operating Temperature: -55°C to 105°C

僅供參考

NO. OF POS.	A	B	C	D	E	F
15	30.80	24.99	16.33	19.10	2.29	10.50
26	39.20	33.32	24.80	27.60	2.29	10.70
44	53.10	47.04	38.38	41.10	2.29	10.70
62	69.40	63.50	54.80	57.45	2.41	10.70

XIAN YI PRECISION CO., LTD.
祥益精密股份有限公司

TITLE / 品名: D-Sub 180度 三排 母座 Dip Type (標規/無銅柱)

PART NO / 料號: D91000-xxF-Rxxxx

核準發行章

APPROVE / 核準	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號
<i>Kin</i>	<i>Chenrong</i>	<i>Chenrong</i>	K-0D-030-00

UNIT / 單位
mm

SHEET 1 OF 1



NO.

REV / 版本

1.0

圖面僅供參考, 實際尺寸以承認圖為主

修訂內容

2025/12/19

日期