


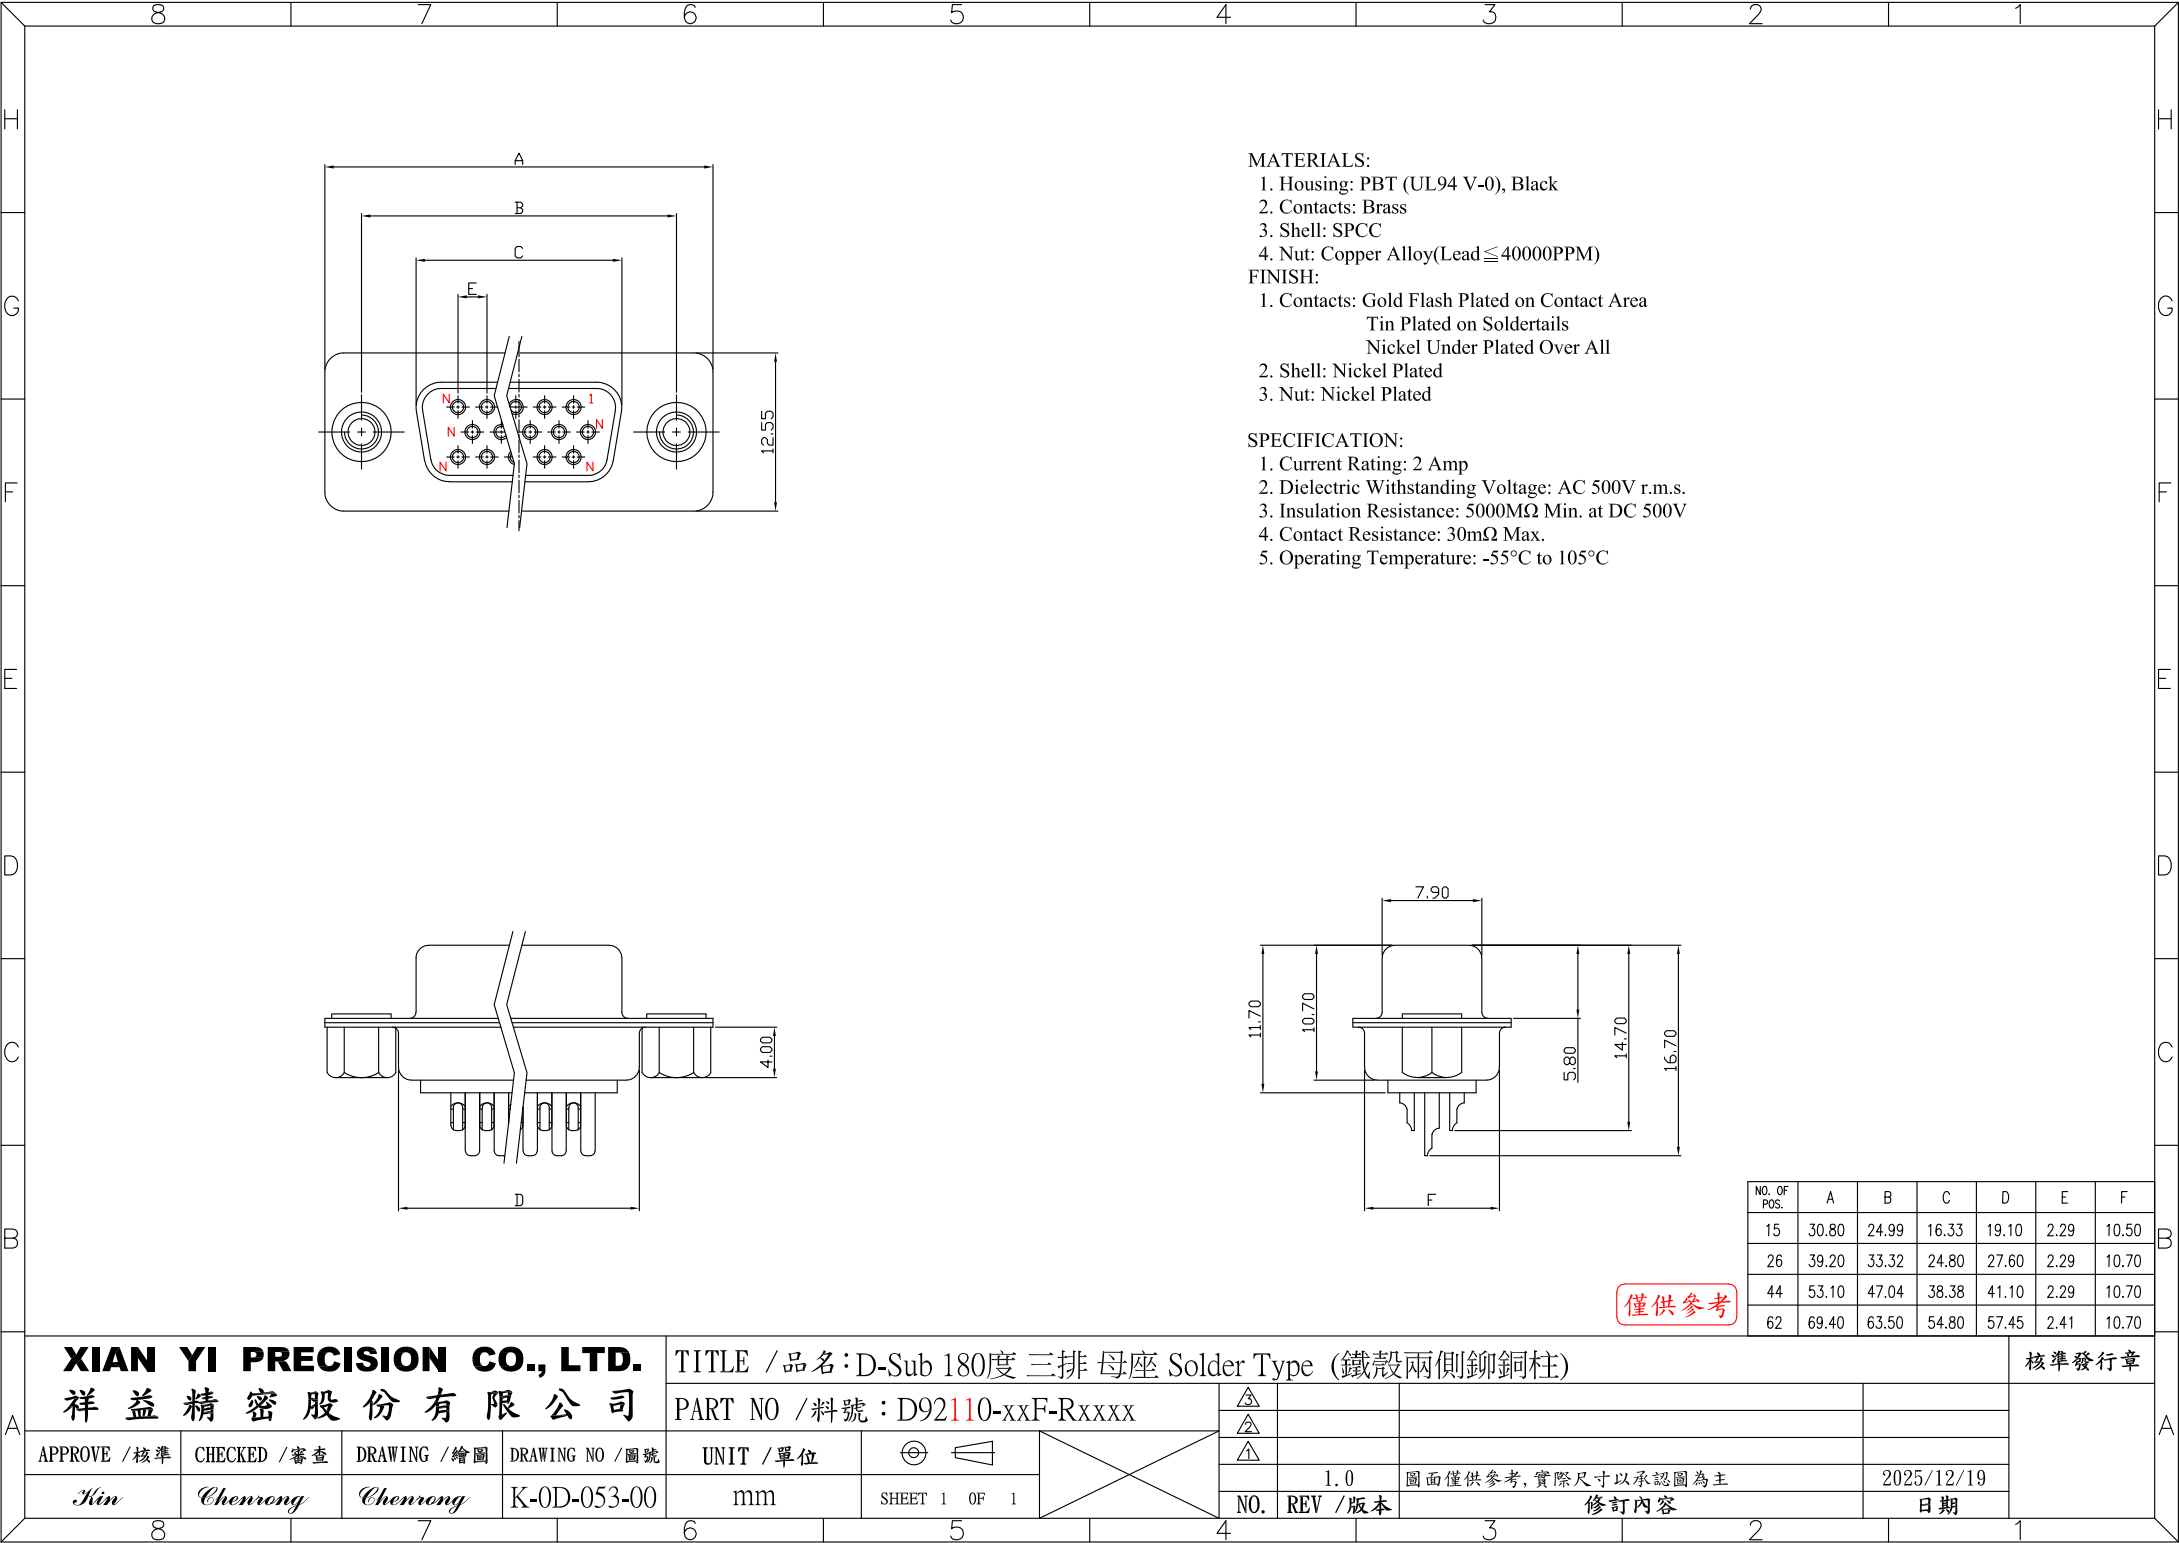

MATERIALS:

- 1. Housing: PBT (UL94 V-0), Black
- 2. Contacts: Brass
- 3. Shell: SPCC
- 4. Nut: Copper Alloy(Lead $\leq$ 40000PPM)

FINISH:

- 1. Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
- 2. Shell: Nickel Plated
- 3. Nut: Nickel Plated


SPECIFICATION:

- 1. Current Rating: 2 Amp
- 2. Dielectric Withstanding Voltage: AC 500V r.m.s.
- 3. Insulation Resistance: 5000M Ω Min. at DC 500V
- 4. Contact Resistance: 30m Ω Max.
- 5. Operating Temperature: -55°C to 105°C

僅供參考

NO. OF POS.	A	B	C	D	E	F
15	30.80	24.99	16.33	19.10	2.29	10.50
26	39.20	33.32	24.80	27.60	2.29	10.70
44	53.10	47.04	38.38	41.10	2.29	10.70
62	69.40	63.50	54.80	57.45	2.41	10.70

XIAN YI PRECISION CO., LTD. 祥益精密股份有限公司	TITLE / 品名: D-Sub 180度 三排 母座 Solder Type (鐵殼兩側鉚銅柱)					核準發行章	
	PART NO / 料號: D92110-xxF-Rxxxx						
APPROVE / 核準	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號	UNIT / 單位			
Kin	Chenrong	Chenrong	K-0D-053-00	mm	SHEET 1 OF 1		
NO.		REV / 版本		修訂內容		日期	

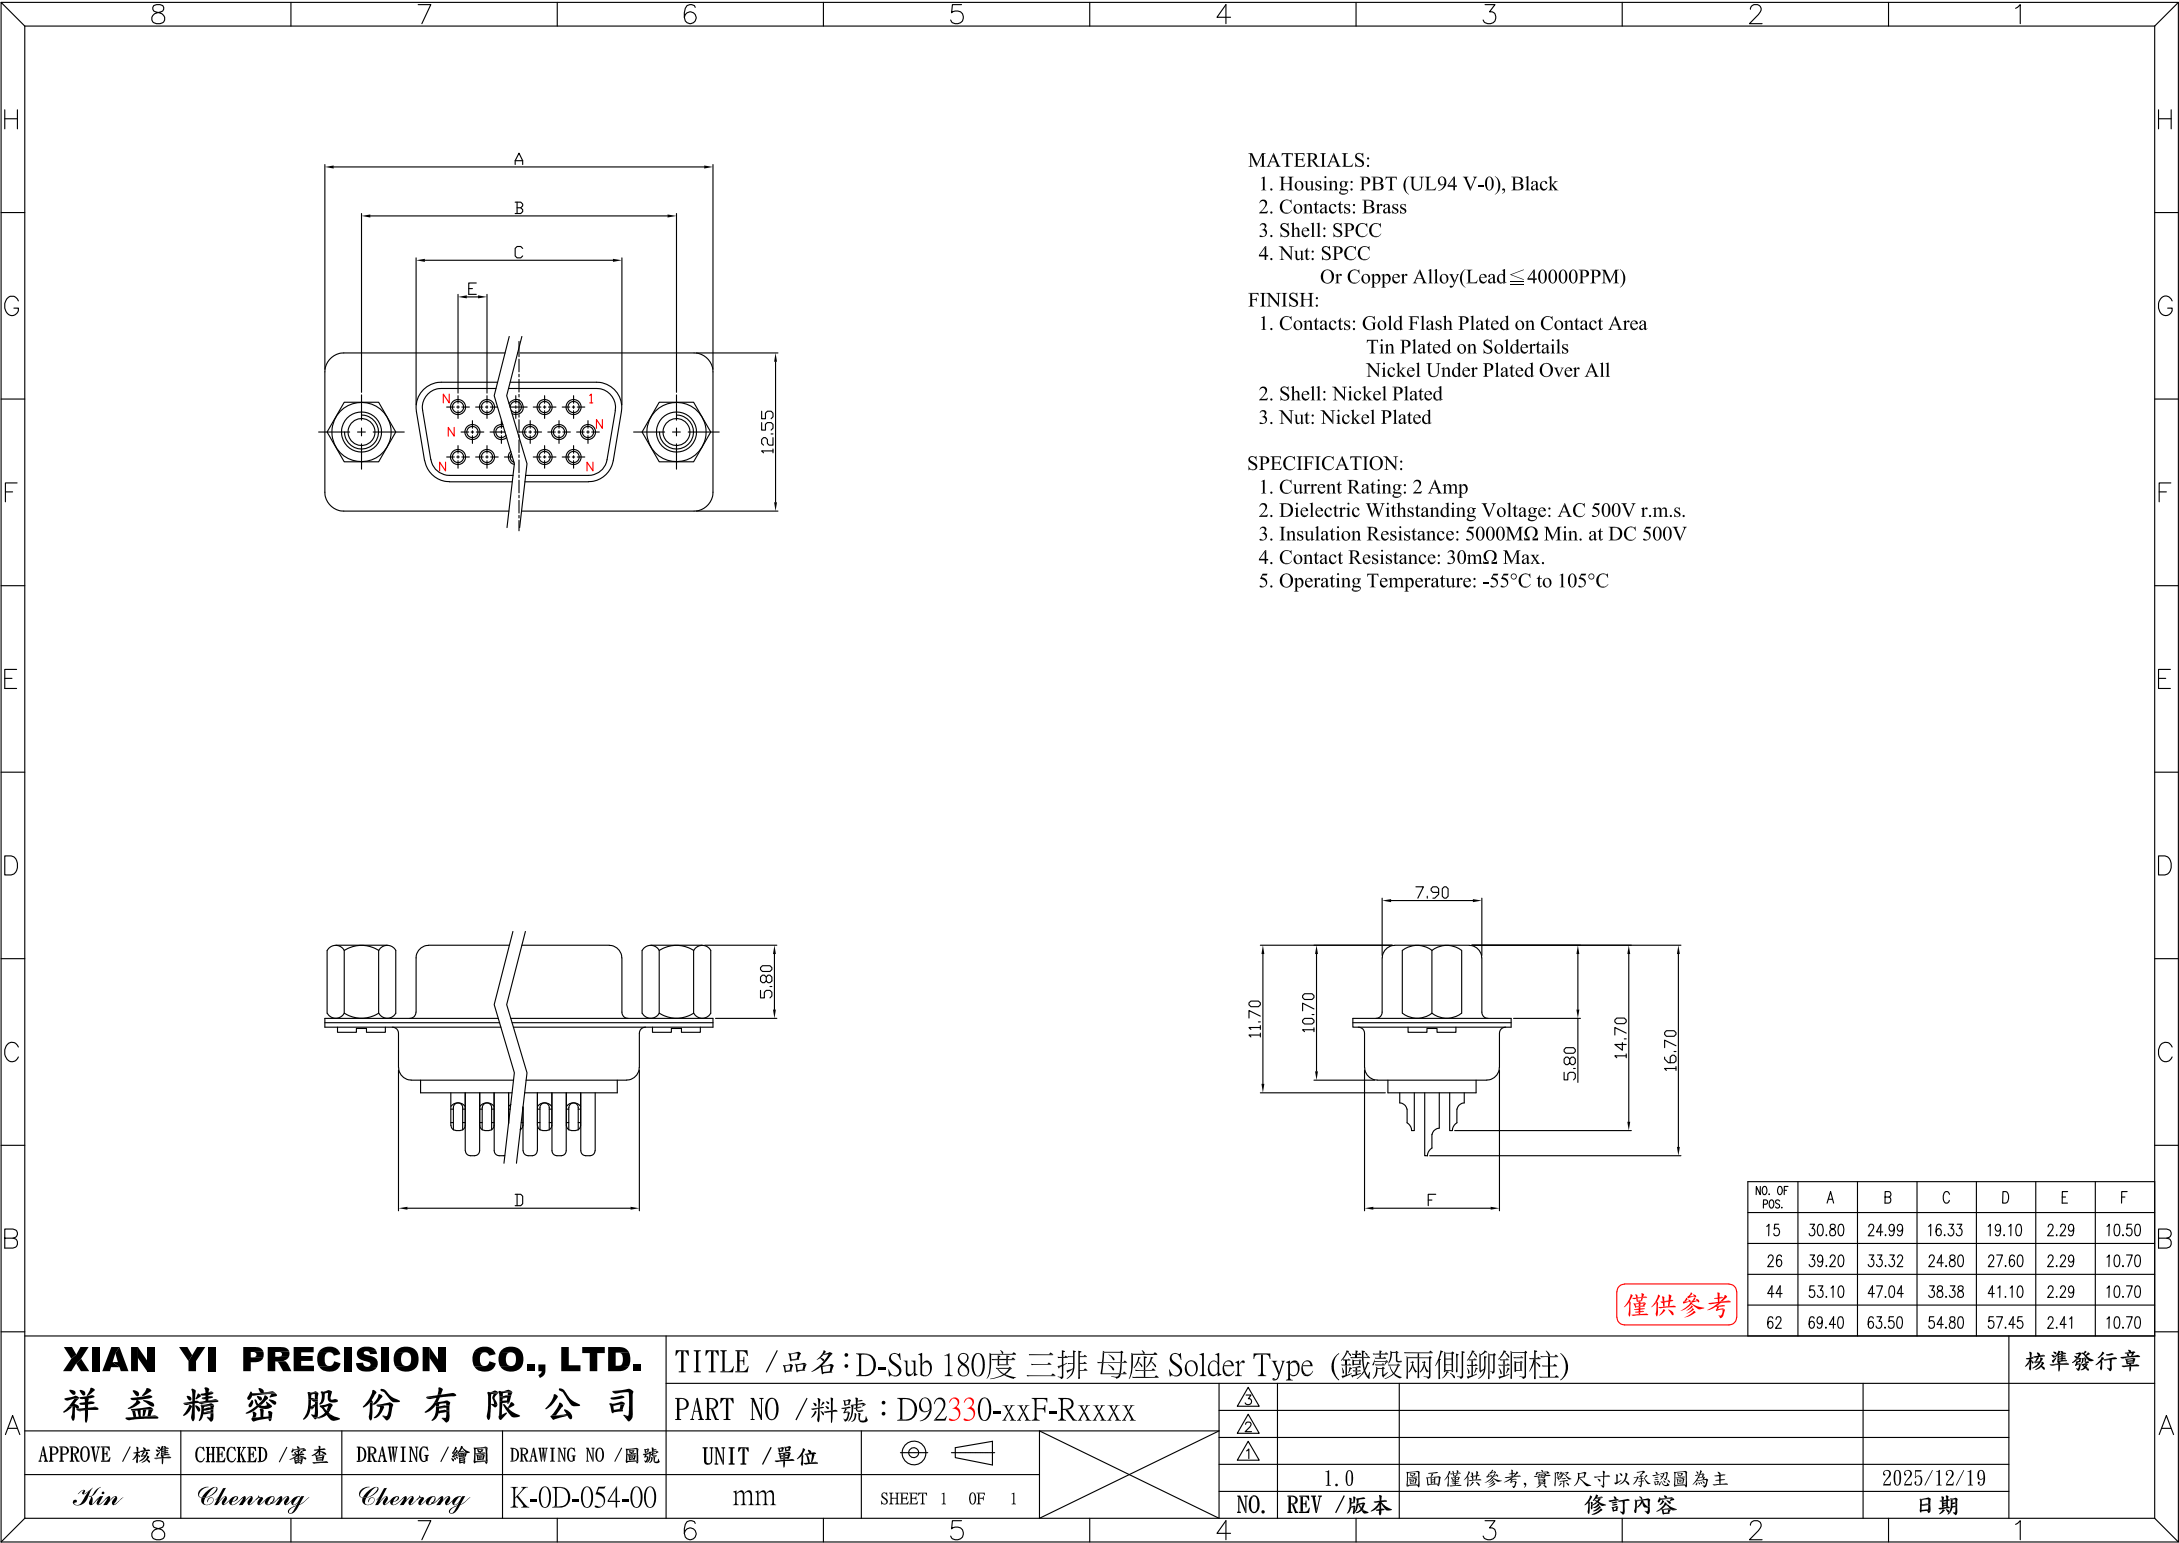

MATERIALS:
1. Housing: PBT (UL94 V-0), Black
2. Contacts: Brass
3. Shell: SPCC
4. Nut: SPCC
Or Copper Alloy(Lead≤40000PPM)

FINISH:
1. Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Nut: Nickel Plated

SPECIFICATION:
1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s.
3. Insulation Resistance: 5000MΩ Min. at DC 500V
4. Contact Resistance: 30mΩ Max.
5. Operating Temperature: -55°C to 105°C

僅供參考

NO. OF POS.	A	B	C	D	E	F
15	30.80	24.99	16.33	19.10	2.29	10.50
26	39.20	33.32	24.80	27.60	2.29	10.70
44	53.10	47.04	38.38	41.10	2.29	10.70
62	69.40	63.50	54.80	57.45	2.41	10.70

XIAN YI PRECISION CO., LTD. 祥益精密股份有限公司	TITLE / 品名: D-Sub 180度 三排 母座 Solder Type (鐵殼兩側鉚銅柱)					核準發行章	
	PART NO / 料號: D92330-xxF-Rxxxx						
APPROVE / 核準	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號	UNIT / 單位			
Kin	Chenrong	Chenrong	K-0D-054-00	mm	SHEET 1 OF 1		
					NO.	REV / 版本	1.0
					圖面僅供參考, 實際尺寸以承認圖為主		2025/12/19
					修訂內容		日期