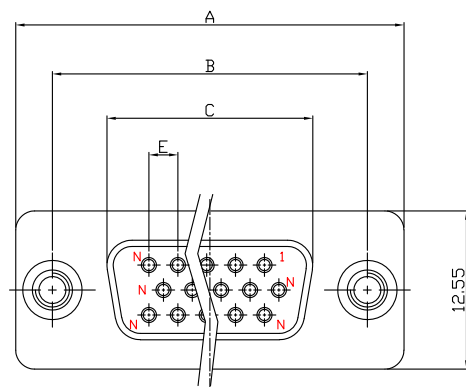


P.C.B. LAYOUT

MATERIALS:



1. Housing: PBT (UL94 V-0), Black
2. Contacts: Brass
3. Shell: SPCC
4. Back Screws: Copper Alloy(Lead $\leq$ 40000PPM)
5. Screw: SPCC
Or Copper Alloy(Lead $\leq$ 40000PPM)

FINISH:


1. Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solder tails
Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Back Screws: Nickel Plated
4. Screw: Nickel Plated

SPECIFICATION:

1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s.
3. Insulation Resistance: 5000M Ω Min. at DC 500V
4. Contact Resistance: 30m Ω Max.
5. Operating Temperature: -55°C to 105°C

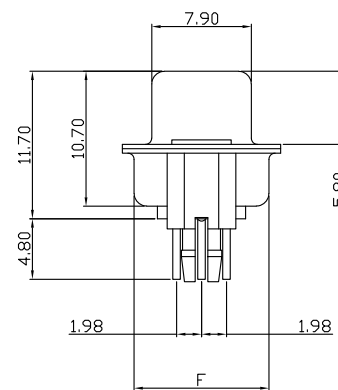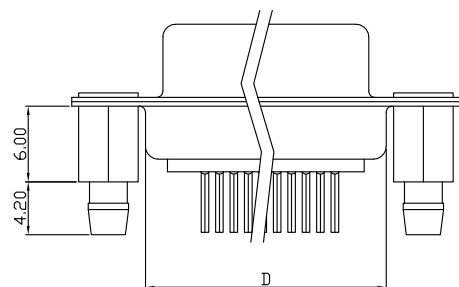

鉀合型

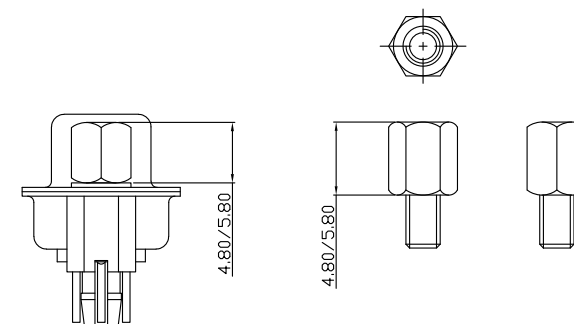

鉚合鎖螺絲型

NO. OF POS.	A	B	C	D	E	F
15	30.80	24.99	16.33	19.10	2.29	10.50
26	39.20	33.32	24.80	27.60	2.29	10.70
44	53.10	47.04	38.38	41.10	2.29	10.70
62	69.40	63.50	54.80	57.45	2.41	10.70

XIAN YI PRECISION CO., LTD.
祥益精密股份有限公司

TITLE / 品名: D-Sub 180度 三排 母座 Dip Type (鐵殼兩側鉚下方銅柱H=6.0)

PART NO /料號：D91240-xxF-Rxxxx

核准發行章


APPROVE /核準

CHECKED / 審查

DRAWING / 繪圖

DRAWING NO /圖號

UNIT / 單位



SHEET 1 OF 1

	1.0
NO.	REV /版本

1.0	圖面僅供參考, 實際尺寸以承認圖為主
-----	--------------------

2023/12/	日期
----------	----

修訂內容