

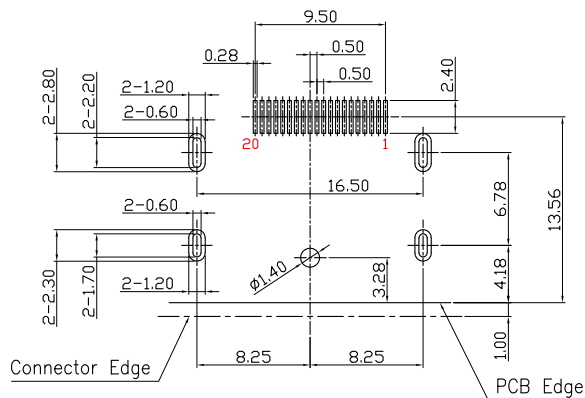



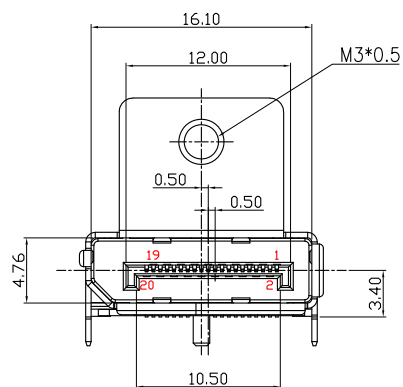

1. Housing: LCP (UL94 V-0), Black
2. Cover: LCP (UL94 V-0), Black
3. Contact: Copper Alloy
4. Shell: Copper Alloy

1. Contact: Gold Flash Plated On Contact Area
Tin Plated On Solder tails
Nickel Under Plated Over All

1. Current: 0.5A
2. Voltage: 40V RMS
3. Dielectric Withstanding Voltage: 500V AC/60S
4. Contact Resistance: 30 mΩ Max.
5. Insulation Resistance: 100MΩ Min. At 500V DC;
6. Operating Temperature: -25°C to +85°C

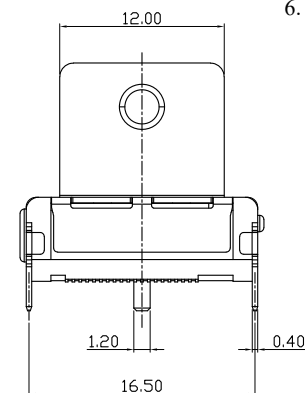

僅供參考

XIAN YI PRECISION CO., LTD.
祥益精密股份有限公司

TITLE /品名:DP 90度 SMD 直腳有柱 M3螺絲孔(H=6.6) 貼麥拉 銅殼

核准發行章

PART NO /料號：DSF20U-11BN-48R1

APPROVE /核準	CHECKED /審查	DRAWING /繪圖	DRAWING NO /圖號	UNIT /單位						
Kin	Chenrong	Chenrong	A-DP-002-00	mm	SHEET 1 OF 1		1.0	圖面僅供參考，實際尺寸以承認圖為主	2025/12/19	
							NO.	REV /版本	修訂內容	日期