

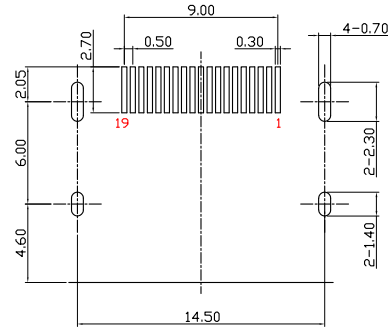




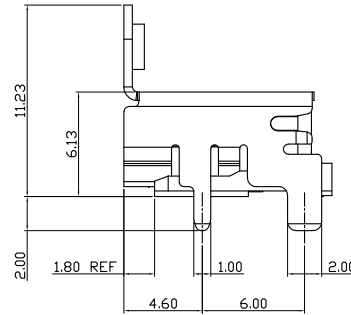

PCB LAYOUT

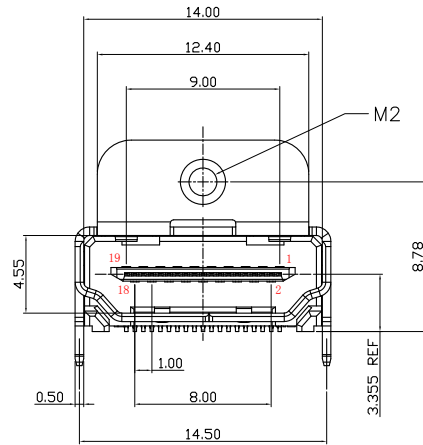

MATERIALS:

1. Housing: LCP (UL94 V-0), Black
2. Contact: Brass
3. Shell: SPCC

FINISH:

1. Contact: Gold Flash Plated On Contact Area  
Tin Plated On Solderails  
Nickel Under Plated Over All
2. Shell: Nickel Plated

SPECIFICATIONS:

1. Current Rating: 0.5 A
2. Voltage Rating: 40 V
3. Contact Resistance: 30 mΩ Max,
4. Insulation Resistance: 100 MΩ Min. At 500V DC.
5. Dielectric Withstanding Voltage: 500V AC/60S
6. Operating Temperature: -25°C To +85°C

僅供參考

XIAN YI PRECISION CO., LTD.  
祥益精密股份有限公司

TITLE / 品名: HDMI(2.1) A/F 90度 SMD 帶M2鎖孔(H=8.78) 鐵殼鍍鎳, 捲裝

核準發行章

PART NO / 料號: HAF19U-11SN-A8R0

| APPROVE / 核準 | CHECKED / 審查    | DRAWING / 繪圖    | DRAWING NO / 圖號 | UNIT / 單位 | ☉            | ☐ |
|--------------|-----------------|-----------------|-----------------|-----------|--------------|---|
| <i>Kin</i>   | <i>Chenrong</i> | <i>Chenrong</i> | A-MI-019-00     | mm        | SHEET 1 OF 1 |   |

|     |          |                    |            |
|-----|----------|--------------------|------------|
| △   |          |                    |            |
| △   |          |                    |            |
| △   |          |                    |            |
|     | 1.0      | 圖面僅供參考, 實際尺寸以承認圖為主 | 2025/12/19 |
| NO. | REV / 版本 | 修訂內容               | 日期         |