

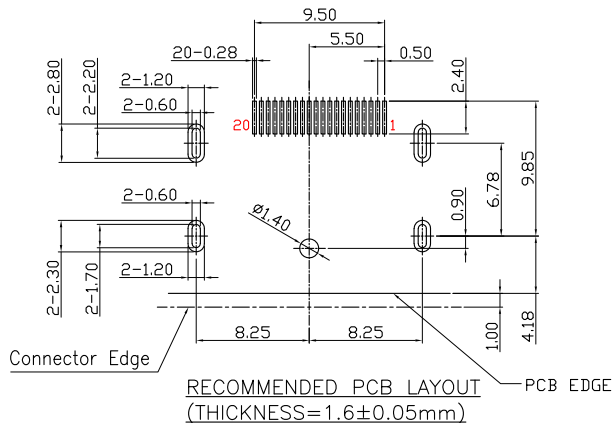




1. Housing: LCP (UL94 V-0), Black
2. Cover: LCP (UL94 V-0), Black
3. Contact: Brass
4. Shell: Brass

1. Contact: Gold Flash Plated On Contact Area
Tin Plated On Solder tails
Nickel Under Plated Over All

1. Current: 0.5A
2. Voltage: 40V RMS
3. Dielectric Withstanding Voltage: 500V AC/60S
4. Contact Resistance: 30 mΩ Max.
5. Insulation Resistance: 100MΩ Min. At 500V DC;
6. Operating Temperature: -25°C to +85°C

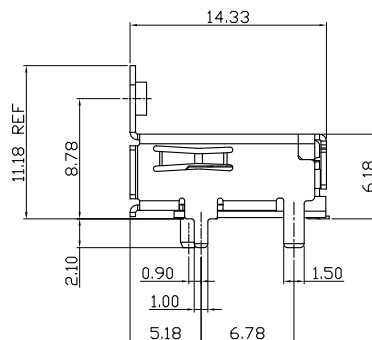

PART NO /料號：DWF20U-11BN-38R0

核準發行章

SHEET 1 OF 1

1.0
EV / 版本

1.0
eV / Å

圖面僅供參考,實際尺寸以承認圖為主

2025/12/19

修訂內容