

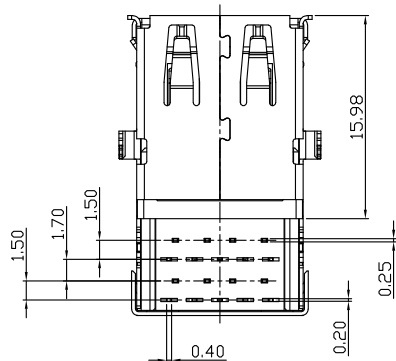




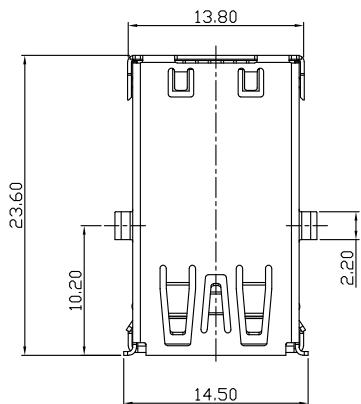

MATERIALS:



1. Housing: High Temperature Thermoplastic (UL 94V-0), Blue
2. Cover: High Temperature Thermoplastic (UL 94V-0), Blue
3. Contacts 5PIN: Brass
4. Contacts 4PIN : Phosphor Bronze
6. Shell: Stainless Steel
7. Isolated: Stainless Steel

FINISH:


1. Contacts: Gold Flash Plated on Contact Area
Tin Plated on Soldertails
Nickel Under Plated Over All
2. Shell: Nickel Plated

SPECIFICATION:

1. Voltage: 30V
2. Current Rating:
1.80 Amperes For Pin1 & Pin4.
0.25 Amperes For Other Contacts
3. Dielectric Withstanding Voltage: AC 100V(RMS)
4. Insulation Resistance: 100MΩ Min.
5. Contact Resistance:
30 mΩ Max. For Pin1 & Pin4
50 mΩ Max. For Other Contacts
6. Operating Temperature: -55°C to 85°C

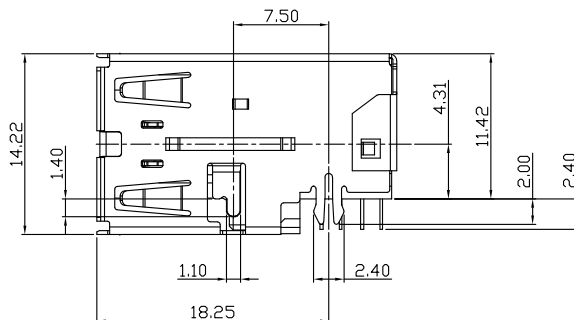

上下無翻邊

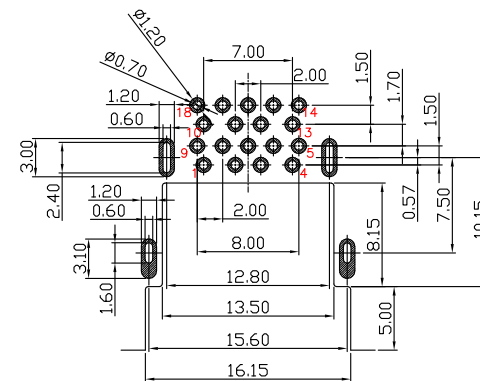

RECOMMENDED P.C.B LAYOUT
(TOP VIEWS)

僅供參考

XIAN YI PRECISION CO., LTD.
祥益精密股份有限公司

TITLE / 品名: USB 3.0 雙層 90度 沉板 Dip Type (板上4.31mm/加長型23.60mm/無彈)

核準發行章

PART NO / 料號: U23B02-18P-RXXXX

APPROVE / 核準	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號	UNIT / 單位	⊕	△
Kin	Chenrong	Chenrong	P-U3-004-00	mm	SHEET 1 OF 1	

NO.	REV / 版本	修訂內容	日期
1.0		圖面僅供參考, 實際尺寸以承認圖為主	2025/12/19