


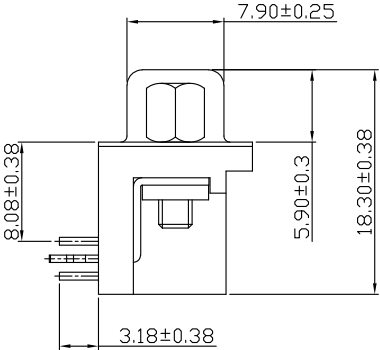
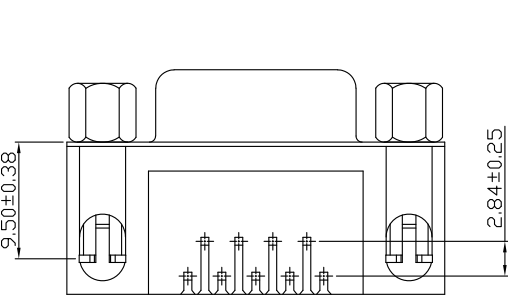
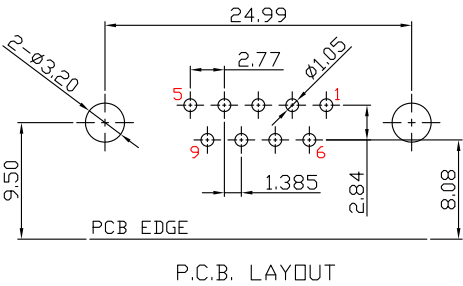


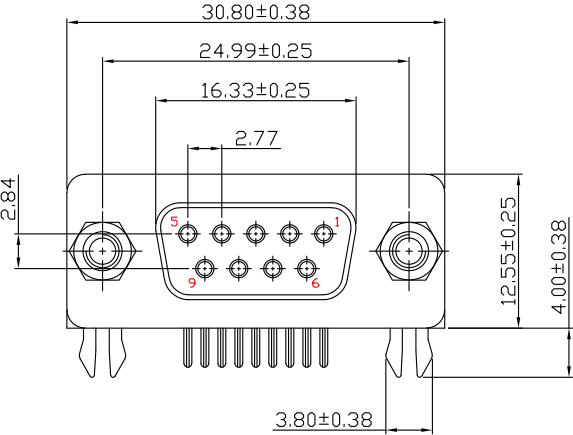


鉗鎖型



直鎖型



鉗合型



- MATERIALS:
- 1. Housing: PBT (UL 94V-0), Black
 - 2. Contacts: Brass
 - 3. Shell: SPCC
 - 4. Rivet: Copper Alloy(Lead≤40000PPM)
 - 5. Board Lock: SPCC
 - 6. Screw: Copper Alloy Or SPCC(Lead≤40000PPM)
- FINISH:
- 1. Contacts: Gold Flash Plated on Contact Area
Sn Plated on Solderails
Nickel Under Plated Over All
 - 2. Shell: Nickel Plated
 - 3. Rivet: Nickel Plated
 - 4. Board Lock: Sn Plated
 - 5. Screw: Nickel Plated

- SPECIFICATION:
- 1. Voltage: 250V
 - 2. Current Rating: 2 Amp
 - 3. Dielectric Withstanding Voltage: AC 500V r.m.s.
 - 4. Insulation Resistance: 5000MΩ Min. at DC 500V
 - 5. Contact Resistance: 30mΩ Max.
 - 6. Operating Temperature: -55°C to 105°C

僅供參考

XIAN YI PRECISION CO., LTD. 祥益精密股份有限公司				TITLE / 品名: D-Sub R/A G/F 09F(8.08mm) Dip RoHS					核準發行章																														
APPROVE / 核準 <i>Kin</i> 8				CHECKED / 審查 <i>Chenrong</i> 7				DRAWING / 繪圖 <i>Chenrong</i> 6				DRAWING NO / 圖號 K-0D-003-00 5				UNIT / 單位 mm SHEET 1 OF 1 4				GENERAL TOLERANCE X ±0.50 .X ±0.38 .XX ±0.25 .XXX ±0.15 3				△ △ △ 1.0 NO. REV / 版本 修訂內容 2				圖面僅供參考, 實際尺寸以承認圖為主 2025/07/07 日期 1				A							
																																				PART NO / 料號: D11xx-09F-R1x51			