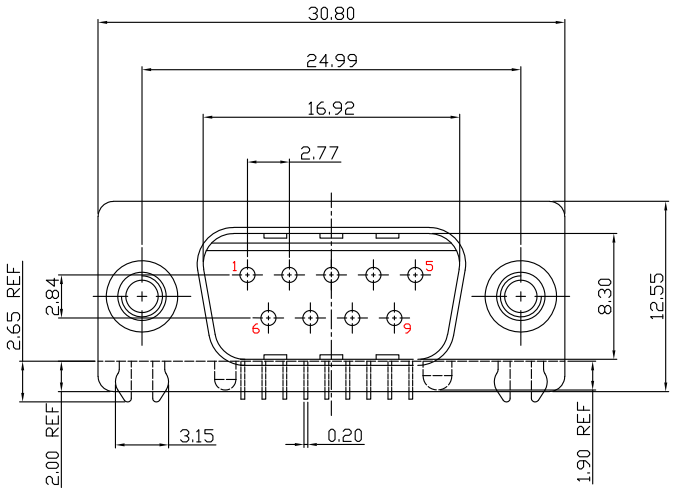

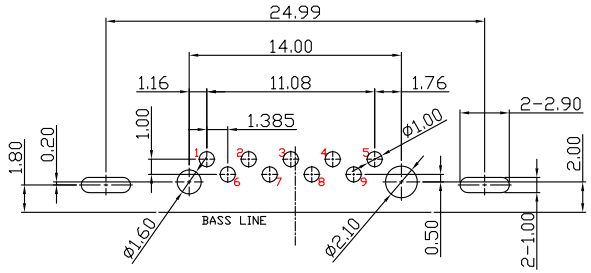

P.C.B. LAYOUT

MATERIALS:
1. Housing: PA9T / PBT (UL 94V-0), Black
2. Contacts: Brass
3. Shell: SPCC
4. Rivet: Copper Alloy(Lead≦40000PPM)
5. Board Lock: SPCC
6. Screw: SPCC
   Or Copper Alloy(Lead≦40000PPM)

FINISH:
1. Contacts: Gold Flash Plated on Contact Area
   Tin Plated on Soldertails
   Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Rivet: Nickel Plated
4. Board Lock: Tin Plated
5. Screw: Nickel Plated

SPECIFICATION:
1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s.
3. Insulation Resistance: 5000MΩ Min. at DC 500V
4. Contact Resistance: 30mΩ Max.
5. Operating Temperature: -55°C to 105°C



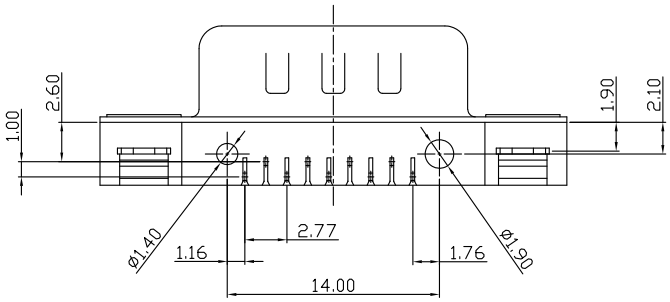



鉚合型



鉚合鎖螺絲型

僅供參考

XIAN YI PRECISION CO., LTD. 祥益精密股份有限公司				TITLE /品名：D-Sub 90度 二排 9公 沉板2.0 板上4.275 板邊距2.6 Dip Type (定位柱間距14.0--1.16 / 1.76)		核準發行章
				PART NO /料號：D40310-09M-Rxxxx		
APPROVE /核準	CHECKED /審查	DRAWING /繪圖	DRAWING NO /圖號	UNIT /單位	SHEET 1 OF 1	
Xin	Chenrong	Chenrong	L-0D-029-00	mm		

NO.	REV /版本	修訂內容	日期
3			
2			
1			
	1.0	圖面僅供參考，實際尺寸以承認圖為主	2025/12/19