
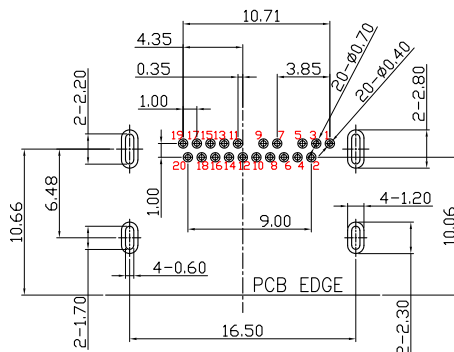


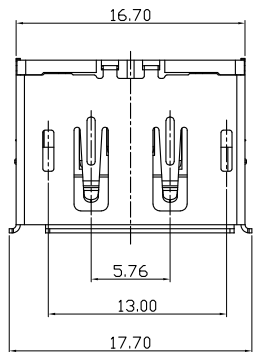

RECOMMENDED PCB LAYOUT
(THICKNESS=1.6)

MATERIALS:





1. Housing: LCP (UL94 V-0), Black
2. Cover: LCP (UL94 V-0), Black
3. Contact: Brass
4. Shell: SUS304

FINISH:

1. Contact: Gold Flash Plated On Contact Area
Tin Plated On Solderails
Nickel Under Plated Over All
2. Shell: Nickel Plated

SPECIFICATION:

1. Current: 0.5A
2. Voltage: 40V RMS
3. Dielectric Withstanding Voltage: 500V AC/60S
4. Contact Resistance: 30 mΩ Max.
5. Insulation Resistance: 100MΩ Min. At 500V DC;
6. Operating Temperature: -25°C to +85°C

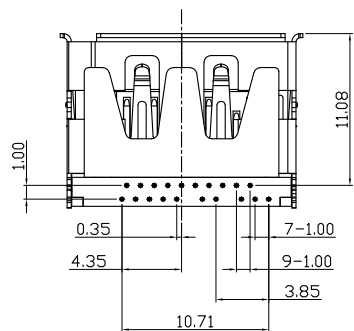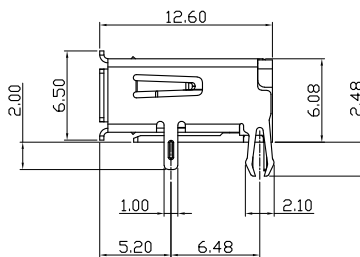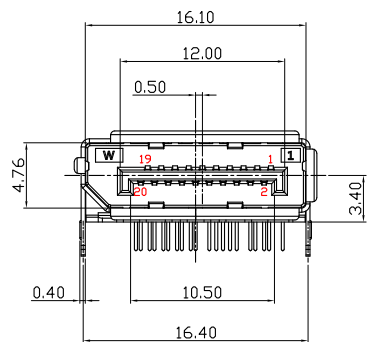

僅供參考

XIAN YI PRECISION CO., LTD.
祥益精密股份有限公司

TITLE / 品名: DP 90度 DIP 無柱 魚叉腳 鋼殼

PART NO / 料號: DSF20L-11AN-58P0

核準發行章

APPROVE / 核準

CHECKED / 審查

DRAWING / 繪圖

DRAWING NO / 圖號

UNIT / 單位

⊕

◁

SHEET 1 OF 1

△

△

△

NO.

REV / 版本

1.0

圖面僅供參考, 實際尺寸以承認圖為主

2025/12/19

修訂內容

日期

Kin

Chenrong

Chenrong

A-DP-004-00

mm