

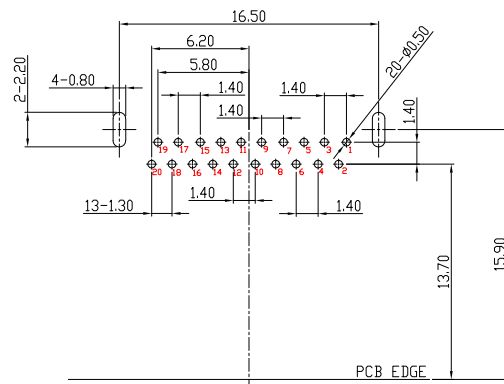






1. Housing: LCP (UL94 V-0), Black
2. Cover: LCP (UL94 V-0), Black
3. Contact: Brass
4. DP Shell: Stainless Steel
5. Rear Cover: Stainless Steel

1. Contact: Gold Flash Plated On Contact Area
Tin Plated On Solderails
Nickel Under Plated Over All
2. DP Shell: Nickel Plated

1. Current: 0.5A
2. Voltage: 40V RMS
3. Dielectric Withstanding Voltage: 500V AC/60S
4. Contact Resistance: 30 mΩ Max.
5. Insulation Resistance: 100MΩ Min. At 500V DC;
6. Temperature Range: -25°C to +85°C

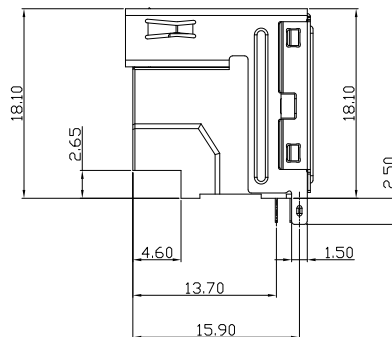

XIAN YI PRECISION CO., LTD.
祥益精密股份有限公司

PART NO /料號: PHC20L-11AN-71P0

僅供參考

核准發行章

APPROVE /核准

CHECKED / 審查

DRAWING / 繪圖

DRAWING NO /圖號

UNIT / 單位

SHEET 1 OF 1

3
2
1

1.0
EV / 版本

圖面僅供參考,實際尺寸以承認圖為主

2025/12/19

修訂內容