
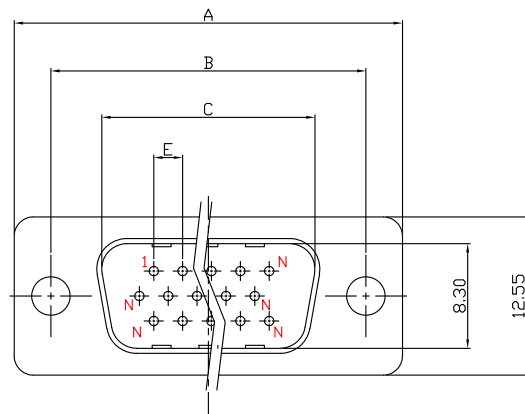



P.C.B. LAYOUT

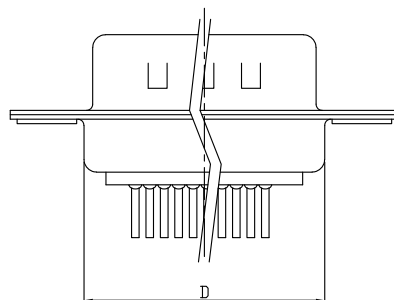

MATERIALS:

1. Housing: PBT (UL94 V-0), Black
2. Contacts: Brass
3. Shell: SPCC

FINISH:

1. Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
2. Shell: Nickel Plated

SPECIFICATION:

1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s.
3. Insulation Resistance: 5000M Ω Min. at DC 500V
4. Contact Resistance: 30m Ω Max.
5. Operating Temperature: -55°C to 105°C

NO. OF POS.	A	B	C	D	E	F
15	30.80	24.99	16.92	19.10	2.29	10.50
26	39.20	33.32	25.25	27.60	2.29	10.70
44	53.10	47.04	38.96	41.10	2.29	10.70
62	69.40	63.50	55.50	57.45	2.41	10.70

僅供參考

XIAN YI PRECISION CO., LTD.

祥益精密股份有限公司

TITLE /品名:D-Sub 180度 三排 公座 Dip Type (標規/無銅柱)

PART NO /料號：D91000-xxM-Rxxxx


APPROVE /核準

CHECKED / 審查

DRAWING / 繪圖

DRAWING NO /圖號

UNIT / 單位



SHEET 1 OF 1

3
2
1

1.0
EV / 版本

1.0
EV / 版本

圖面僅供參考, 實際尺寸以承認圖為主	
修訂內容	

修訂內容

025/12/19
日期

025/12/19
日期

核准發行章