

P.C.B. LAYOUT

MATERIALS:



1. Housing: PBT (UL 94V-0), Black / Blue
2. Contacts: Brass
3. Shell: SPCC
4. Rivet: Copper Alloy(Lead \leq 40000PPM)
5. Board Lock: SPCC
6. Screw: SPCC
Or Copper Alloy(Lead \leq 40000PPM)

FINISH:


1. Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Rivet: Nickel Plated
4. Board Lock: Tin Plated
5. Screw: Nickel Plated

SPECIFICATION:


1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V For 1 minute
3. Insulation Resistance: 5000M Ω Min
4. Contact Resistance: 30m Ω Max.
5. Operating Temperature: -55 $^{\circ}$ C to +105 $^{\circ}$ C

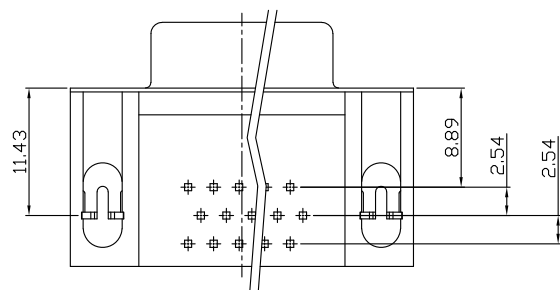

鉚合型



鉚合鎖螺絲型



僅供參考

NO. OF POS.	A	B	C	D
15	30.80	24.99	16.33	2.29
26	39.20	33.32	24.66	2.29
44	53.10	47.04	38.38	2.29
62	69.40	63.50	54.80	2.41

XIAN YI PRECISION CO., LTD.

祥益精密股份有限公司

TITLE / 品名: D-Sub 90度 三排 母座 (板邊距8.89) Dip Type

PART NO / 料號: D2110-xxF-Rxxxx

核準發行章

APPROVE / 核準	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號	UNIT / 單位	☉	☐
<i>Kin</i>	<i>Chenrong</i>	<i>Chenrong</i>	K-0D-010-00	mm	SHEET 1 OF 1	

NO.	REV / 版本	圖面僅供參考, 實際尺寸以承認圖為主	2025/12/19
		修訂內容	日期