
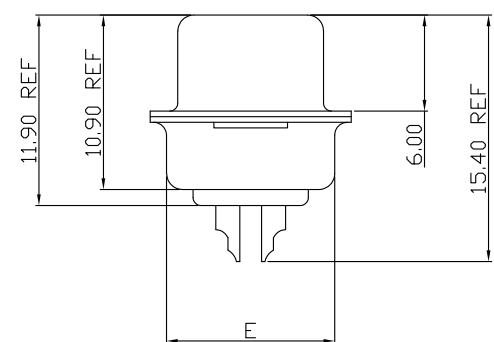
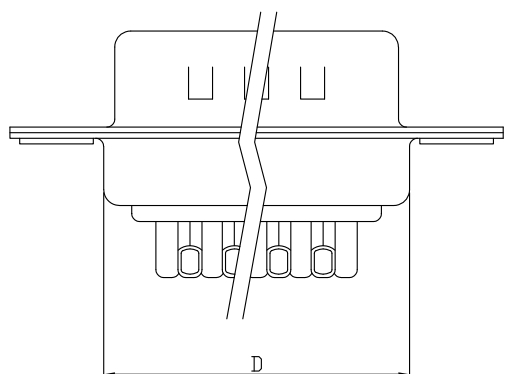


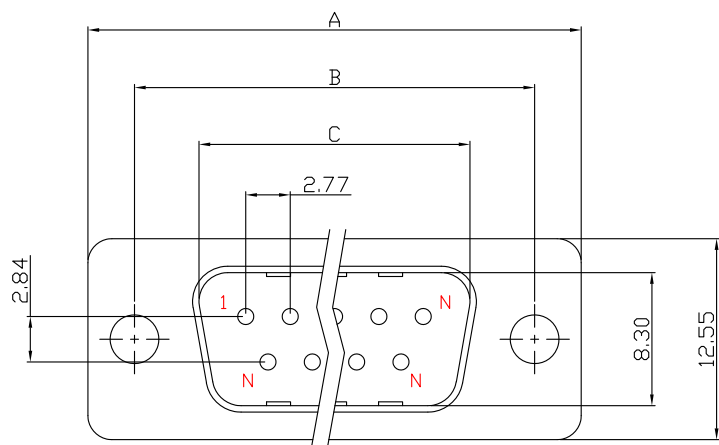


MATERIALS:
1. Housing: PBT (UL 94V-0), Black / White
2. Contacts: Brass
3. Shell: SPCC
FINISH:
1. Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
2. Shell: Nickel Plated
SPECIFICATION:
1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s.
3. Insulation Resistance: 5000MΩ Min. at DC 500V
4. Contact Resistance: 30mΩ Max.
5. Operating Temperature: -55°C to 105°C

僅供參考

NO. OF POS.	A	B	C	D	E
09	30.80	24.99	16.92	19.10	10.50
15	39.20	33.32	25.25	27.60	10.60
25	53.04	47.04	38.96	41.10	10.60
37	69.40	63.50	55.42	57.44	10.70

XIAN YI PRECISION CO., LTD.
祥益精密股份有限公司

TITLE / 品名: D-Sub 180度 二排 公座 Solder Type (標規/無銅柱)							核準發行章	
PART NO / 料號: D82000-xxM-Rxxxx								
								
UNIT / 單位								
mm	SHEET 1 OF 1			1.0	圖面僅供參考, 實際尺寸以承認圖為主		2025/12/19	
			NO.	REV / 版本	修訂內容		日期	