
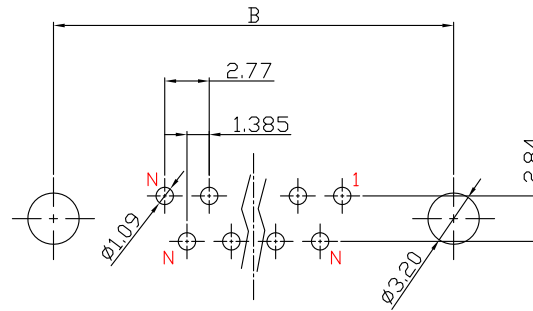


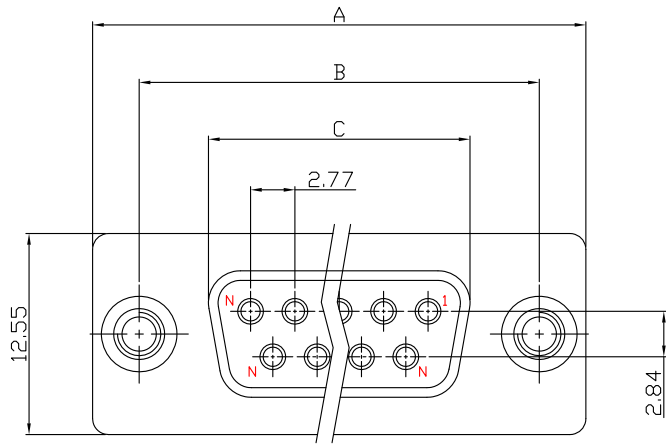

PCB LAYOUT

MATERIALS:



1. Housing: PBT (UL 94V-0), Black / White
2. Contacts: Brass
3. Shell: SPCC
4. Back Screws: Copper Alloy(Lead $\leq$ 40000PPM)
Or Copper Alloy(Lead $\leq$ 40000PPM)
5. Screw: SPCC

FINISH:


1. Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Back Screws: Nickel Plated
4. Screw: Nickel Plated

SPECIFICATION:


1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s.
3. Insulation Resistance: 5000M Ω Min. at DC 500V
4. Contact Resistance: 30m Ω Max.
5. Operating Temperature: -55°C to 105°C

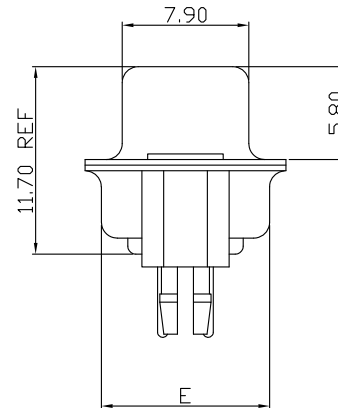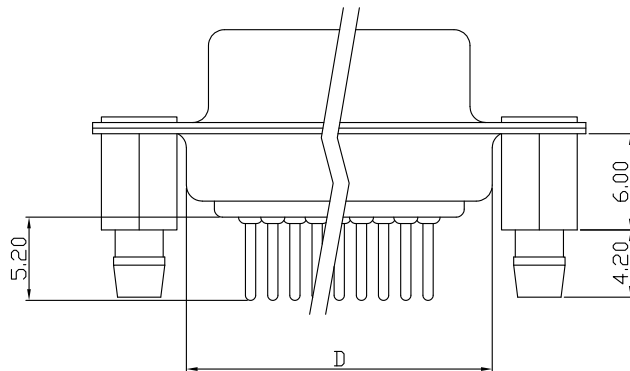

鉗合型

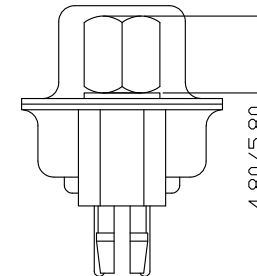

鉗合鎖螺絲型

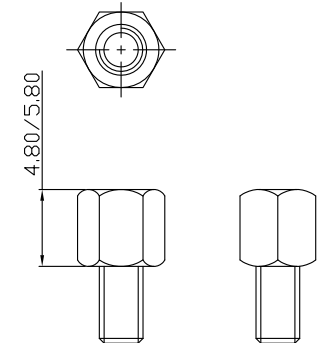

僅供參考

NO. OF POS.	A	B	C	D	E
09F	30.80	24.99	16.33	19.10	10.50
15F	39.20	33.32	24.75	27.60	10.60
25F	53.04	47.04	38.38	41.10	10.60
37F	69.40	63.50	54.80	57.44	10.70

XIAN YI PRECISION CO., LTD.

祥益精密股份有限公司

TITLE / 品名: D-Sub 180度 二排 母座 Dip Type (鐵殼兩側鉗下方銅柱H=6.0)

PART NO / 料號: D81240-xxF-Rxxxx

核准發行章

APPROVE / 核准	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號
<i>Kin</i>	<i>Chenrong</i>	<i>Chenrong</i>	K-0D-022-00

UNIT / 單位	SHEET 1 OF 1
mm	

NO.	REV / 版本	修訂內容	日期
1.0		圖面僅供參考, 實際尺寸以承認圖為主	2025/12/19