
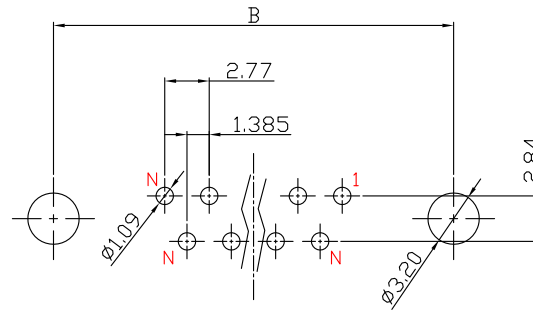


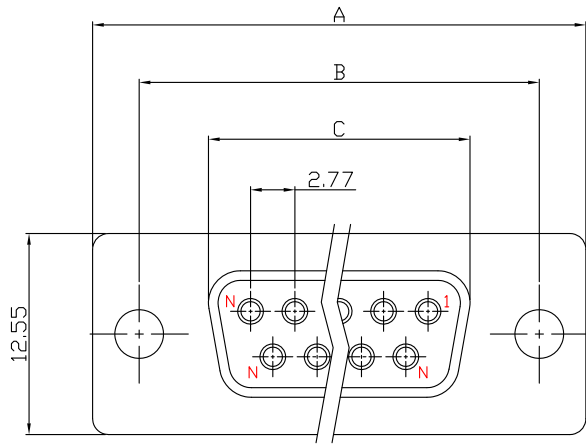

PCB LAYOUT

MATERIALS:



1. Housing: PBT (UL 94V-0), Black / White
2. Contacts: Brass
3. Shell: SPCC

FINISH:

1. Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
2. Shell: Nickel Plated

SPECIFICATION:

1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s.
3. Insulation Resistance: 5000M Ω Min. at DC 500V
4. Contact Resistance: 30m Ω Max.
5. Operating Temperature: -55°C to 105°C

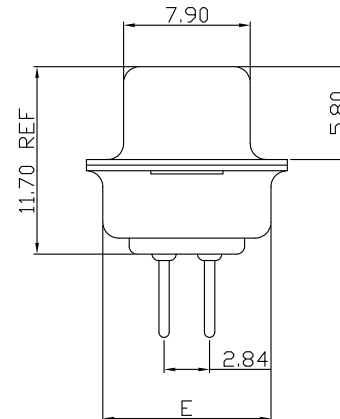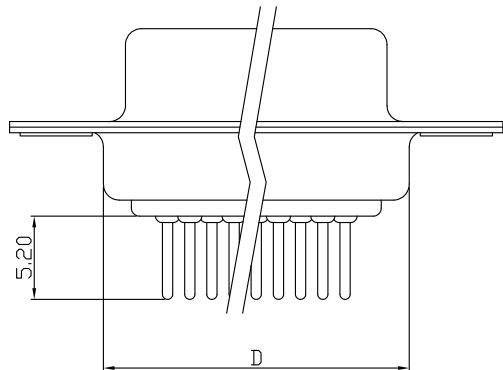

僅供參考

NO. OF POS.	A	B	C	D	E
09F	30.80	24.99	16.33	19.10	10.50
15F	39.20	33.32	24.75	27.60	10.60
25F	53.04	47.04	38.38	41.10	10.60
37F	69.40	63.50	54.80	57.44	10.70

XIAN YI PRECISION CO., LTD.

祥益精密股份有限公司

TITLE / 品名: D-Sub 180度 二排 母座 Dip Type (標規/無銅柱)

PART NO / 料號: D81000-xxF-Rxxxx

核準發行章

APPROVE / 核準	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號
<i>Kin</i>	<i>Chenrong</i>	<i>Chenrong</i>	K-0D-021-00

UNIT / 單位		
mm	SHEET 1 OF 1	

NO.	REV / 版本	圖面僅供參考, 實際尺寸以承認圖為主	2025/12/19
		修訂內容	日期