

MATERIALS:

- Housing: PBT (UL 94V-0), Black
- Bracket: PBT (UL 94V-0), Black
- Contacts: Brass
- Shell: SPCC
- Rivet: Copper Alloy(Lead \leq 40000PPM)
- Board Lock: SPCC
- Screw: SPCC





Or Copper Alloy(Lead \leq 40000PPM)

FINISH:

- Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
- Shell: Nickel Plated
- Rivet: Nickel Plated
- Board Lock: Tin Plated
- Screw: Nickel Plated

SPECIFICATION:

- Current Rating: 2 Amp
- Dielectric Withstanding Voltage: AC 500V For 1 minute
- Insulation Resistance: 5000M Ω Min
- Contact Resistance: 30m Ω Max.
- Operating Temperature: -55 $^{\circ}$ C to +105 $^{\circ}$ C

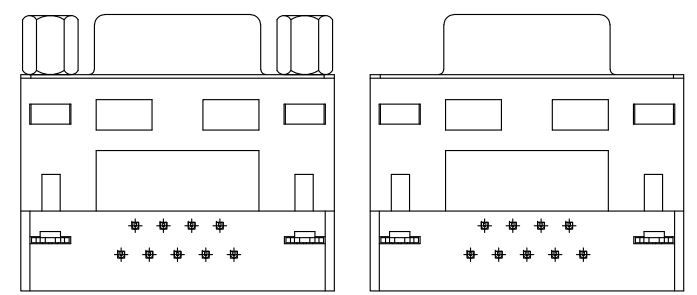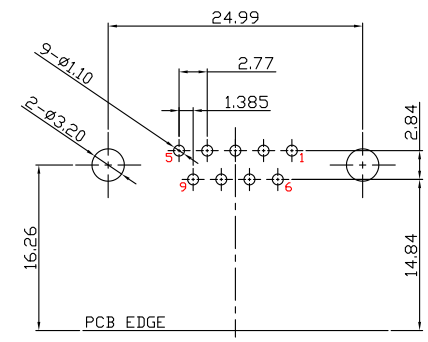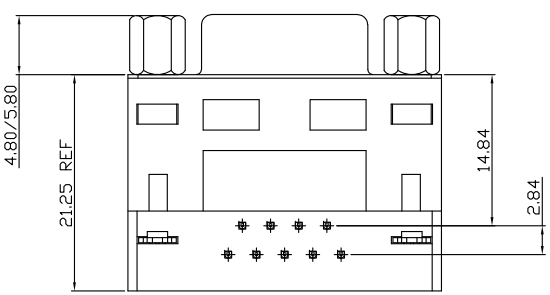

鉚合鎖螺絲型 鉚合型 僅供參考

XIAN YI PRECISION CO., LTD.
祥益精密股份有限公司

TITLE / 品名: D-Sub 二排 9P 母座 90度 架高型 DIP Type

PART NO / 料號: D35122-09F-Rxxxx

核準發行章

APPROVE / 核準	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號	UNIT / 單位	☉	X
<i>Kin</i>	<i>Chenrong</i>	<i>Chenrong</i>	L-0D-031-00	mm	SHEET 1 OF 1	

NO.	REV / 版本	圖面僅供參考, 實際尺寸以承認圖為主	2025/12/19
		修訂內容	日期