


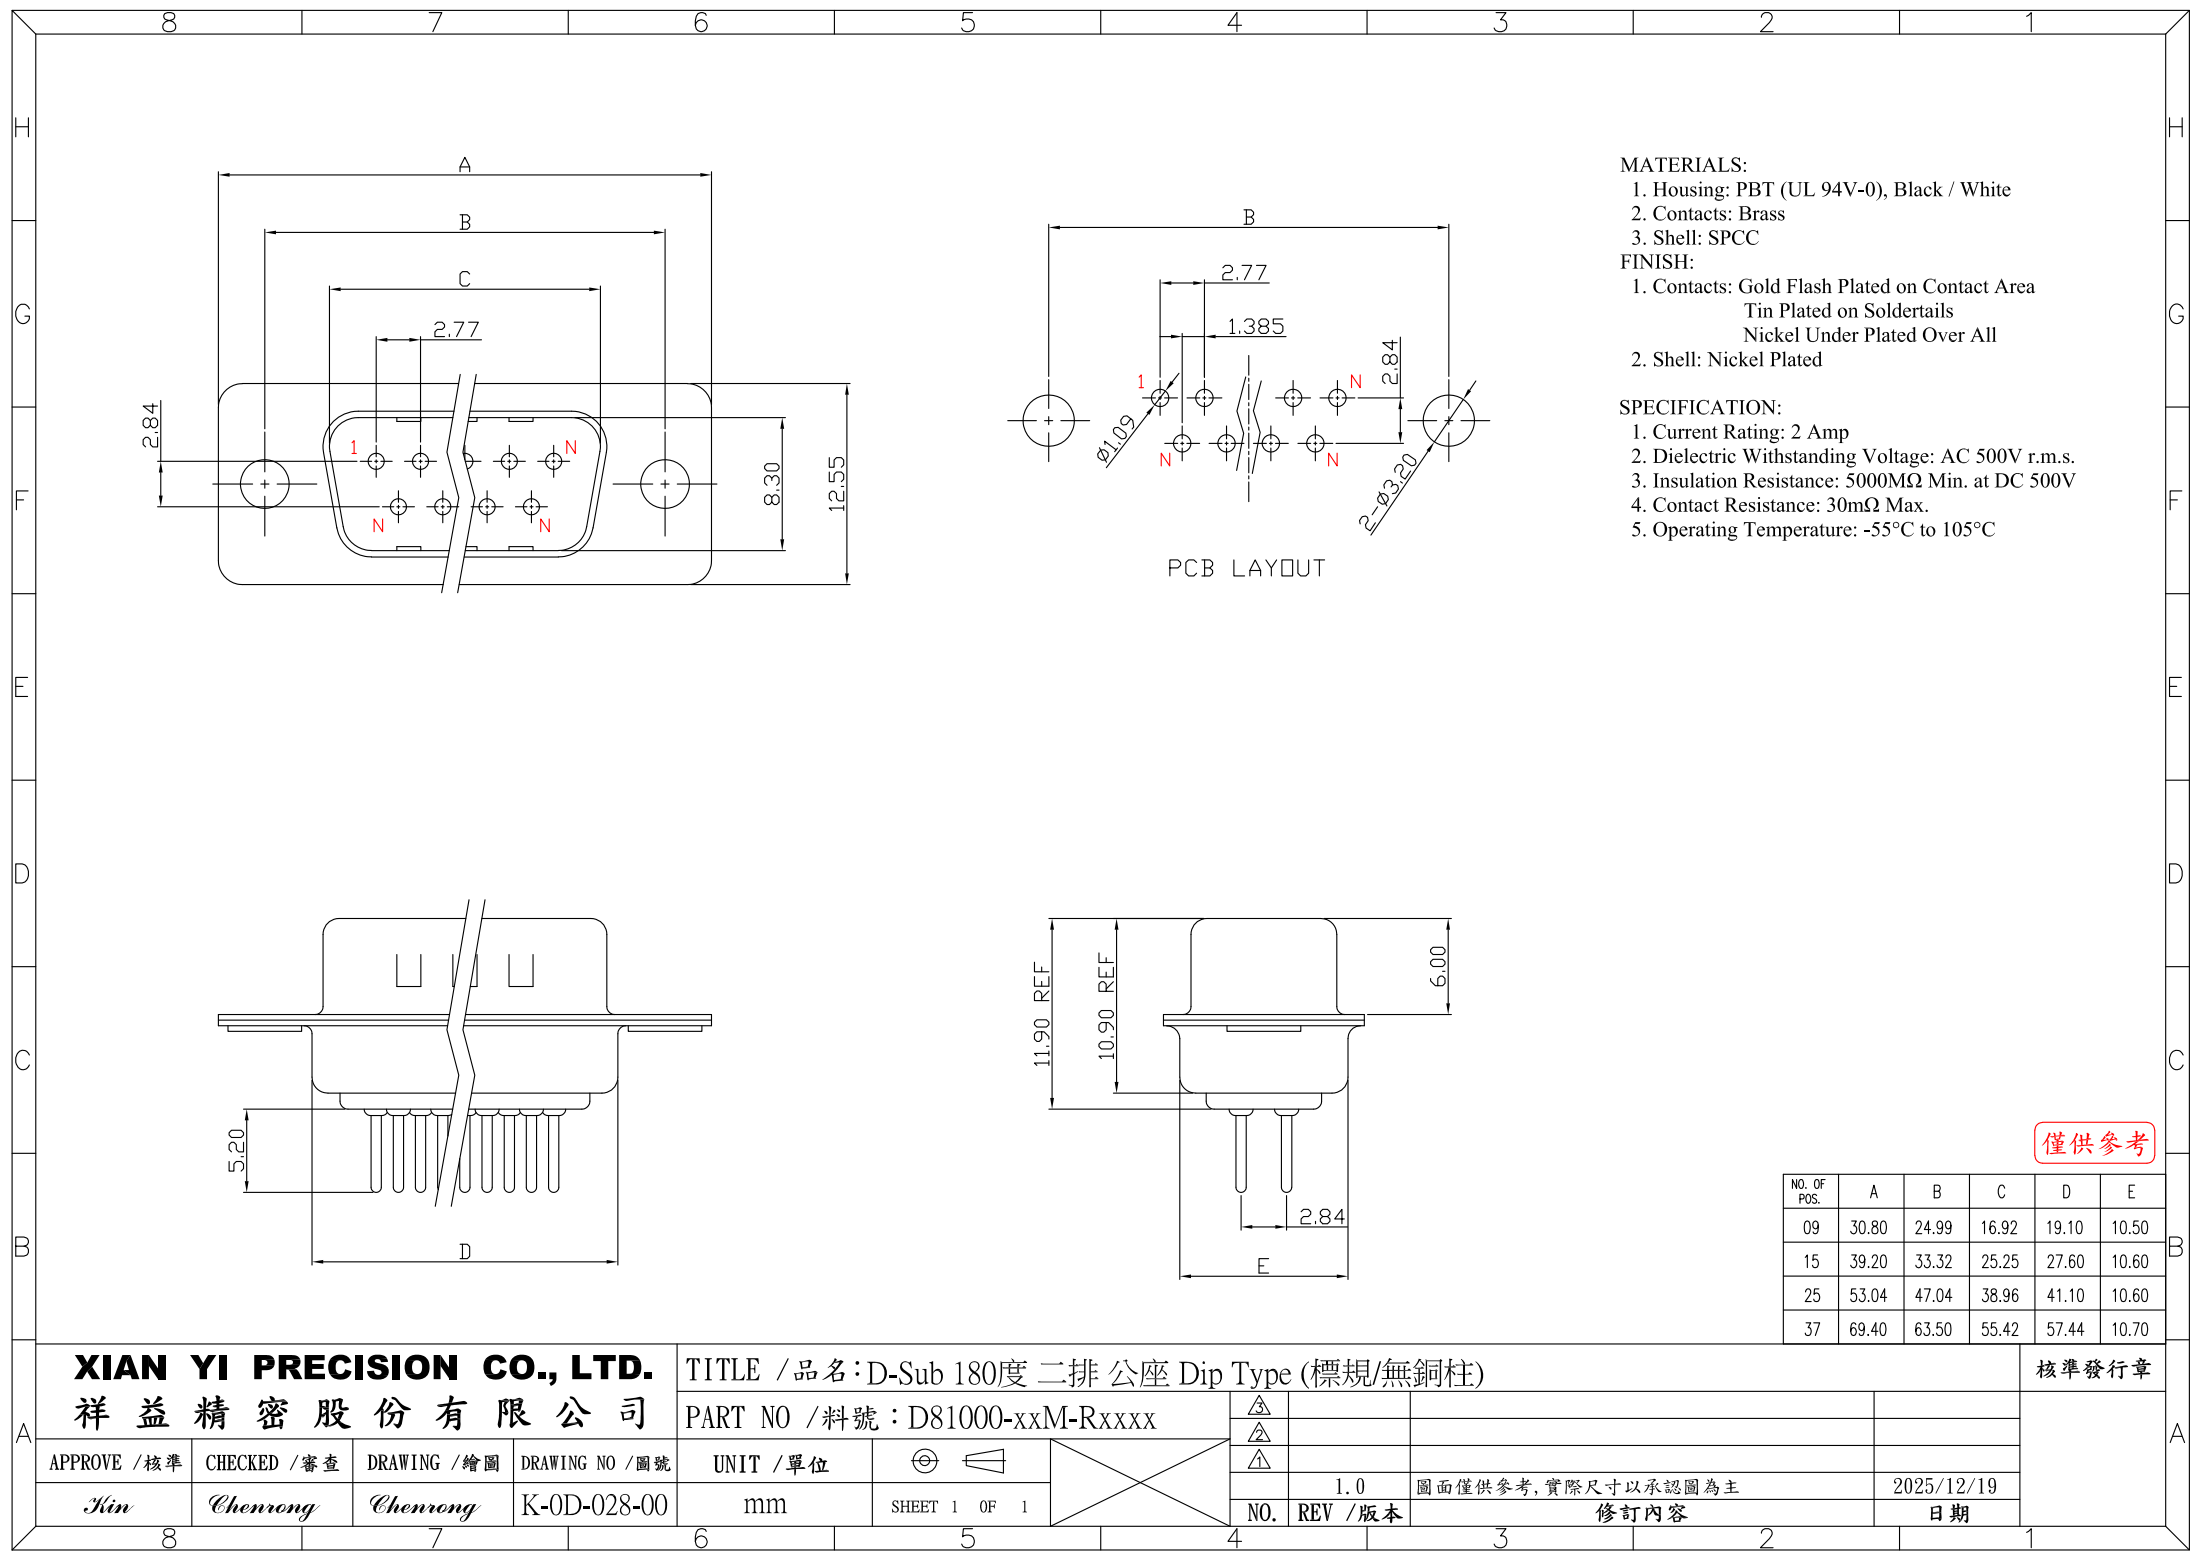

MATERIALS:

- 1. Housing: PBT (UL 94V-0), Black / White
- 2. Contacts: Brass
- 3. Shell: SPCC

FINISH:

- 1. Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
- 2. Shell: Nickel Plated

SPECIFICATION:

- 1. Current Rating: 2 Amp
- 2. Dielectric Withstanding Voltage: AC 500V r.m.s.
- 3. Insulation Resistance: 5000MΩ Min. at DC 500V
- 4. Contact Resistance: 30mΩ Max.
- 5. Operating Temperature: -55°C to 105°C

僅供參考

NO. OF POS.	A	B	C	D	E
09	30.80	24.99	16.92	19.10	10.50
15	39.20	33.32	25.25	27.60	10.60
25	53.04	47.04	38.96	41.10	10.60
37	69.40	63.50	55.42	57.44	10.70

XIAN YI PRECISION CO., LTD.
祥益精密股份有限公司

TITLE / 品名: D-Sub 180度 二排 公座 Dip Type (標規/無銅柱)

PART NO / 料號: D81000-xxM-Rxxxx

核准發行章

APPROVE / 核準

CHECKED / 審查

DRAWING / 繪圖

DRAWING NO / 圖號

UNIT / 單位

SHEET 1 OF 1

Kin

Chenrong

Chenrong

K-0D-028-00

mm

NO. REV / 版本

1.0

圖面僅供參考, 實際尺寸以承認圖為主

2025/12/19

修訂內容

日期