
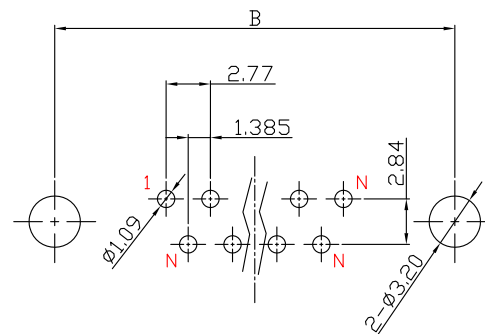


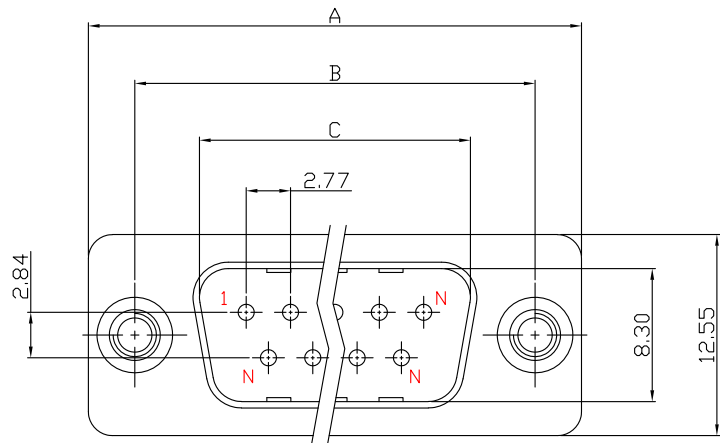

PCB LAYOUT

MATERIALS:



1. Housing: PBT (UL 94V-0), Black / White
2. Contacts: Brass
3. Shell: SPCC
4. Back Screws: Copper Alloy(Lead $\leq$ 40000PPM)
Or Copper Alloy(Lead $\leq$ 40000PPM)
5. Screw: SPCC

FINISH:


1. Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Back Screws: Nickel Plated
4. Screw: Nickel Plated

SPECIFICATION:


1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s.
3. Insulation Resistance: 5000M Ω Min. at DC 500V
4. Contact Resistance: 30m Ω Max.
5. Operating Temperature: -55°C to 105°C

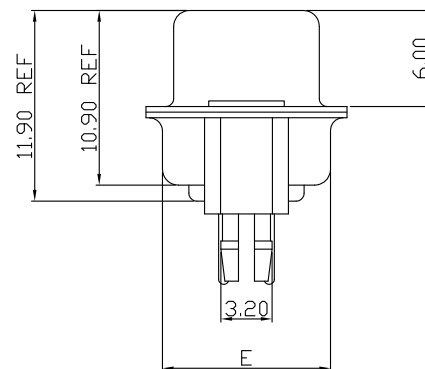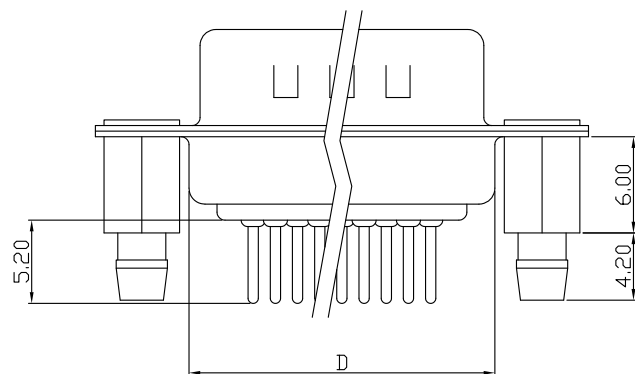

鉗合型



鉗合鎖螺絲型



僅供參考

NO. OF POS.	A	B	C	D	E
09	30.80	24.99	16.92	19.10	10.50
15	39.20	33.32	25.25	27.60	10.60
25	53.04	47.04	38.96	41.10	10.60
37	69.40	63.50	55.42	57.44	10.70

XIAN YI PRECISION CO., LTD.

祥益精密股份有限公司

TITLE / 品名: D-Sub 180度 二排 公座 Dip Type (鐵殼兩側鉗下方銅柱H=6.0)

PART NO / 料號: D81240-xxM-Rxxxx

核準發行章

APPROVE / 核準

CHECKED / 審查

DRAWING / 繪圖

DRAWING NO / 圖號

UNIT / 單位

SHEET 1 OF 1

GENERAL TOLERANCE
X $\pm$ 0.50
.X $\pm$ 0.38
.XX $\pm$ 0.25
.XXX $\pm$ 0.15

NO. REV / 版本

1.0

圖面僅供參考, 實際尺寸以承認圖為主

2025/12/19

修訂內容

日期

Kin

Chenrong

Chenrong

K-0D-023-00

mm

SHEET 1 OF 1