
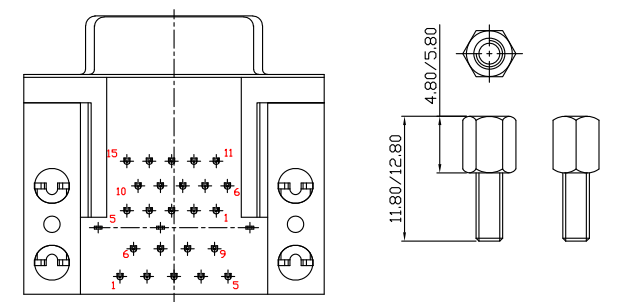
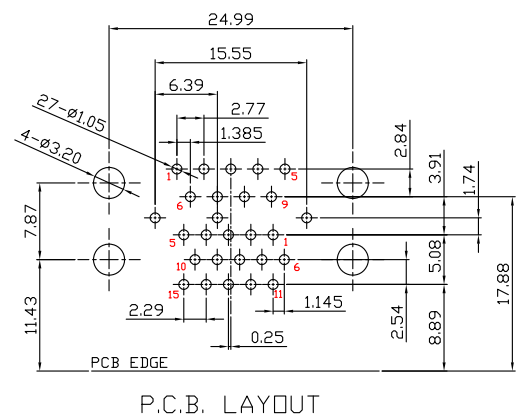


- MATERIALS:**
- Housing: PBT (UL 94V-0)  
9M Color: Green  
15F Color: Blue
  - Connecting Seat: PA66 (UL 94V-0) Black
  - Contacts: Brass
  - Shell: SPCC
  - Rivet: Copper Alloy(Lead $\leq$ 40000PPM)
  - Board Lock: SPCC
  - L Bracket: SPCC
  - Shield: SUS
  - Screw: SPCC  
Or Copper Alloy(Lead $\leq$ 40000PPM)
- FINISH:**
- 9M Contacts: Gold Flash Plated on Contact Area  
Tin Plated on Solderails  
Nickel Under Plated Over All
  - 15F Contacts: Gold Flash Plated on Contact Area  
Tin Plated on Solderails  
Nickel Under Plated Over All
  - Shell: Nickel Plated
  - Rivet: Nickel Plated
  - Board Lock: Tin Plated
  - L Bracket: Nickel Plated
  - Shield: Nickel Plated
  - Screw: Nickel Plated

- SPECIFICATION:**
- Current Rating: 2 Amp
  - Dielectric Withstanding Voltage: AC 500V For 1 minute
  - Insulation Resistance: 5000M $\Omega$  Min
  - Contact Resistance: 30m $\Omega$  Max.
  - Operating Temperature: -55°C to +105°C

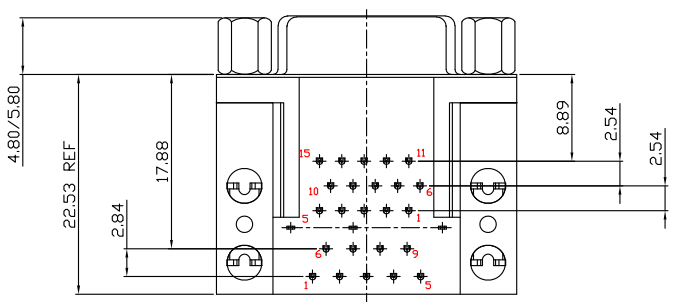

僅供參考

**XIAN YI PRECISION CO., LTD.**  
**祥益精密股份有限公司**

TITLE / 品名: D-Sub 90度 疊層 9公+VGA-15母(8.89/屏蔽殼/接遞P) Dip Type (層距19.05/後排板邊距17.88)

PART NO / 料號: DB5222-1M1F-Rxxxx

核準發行章

APPROVE / 核準	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號	UNIT / 單位	☉	X
<i>Kin</i>	<i>Chenrong</i>	<i>Chenrong</i>	A-2D-004-00	mm	SHEET 1 OF 1	

NO.	REV / 版本	圖面僅供參考, 實際尺寸以承認圖為主	2025/12/19
		修訂內容	日期