

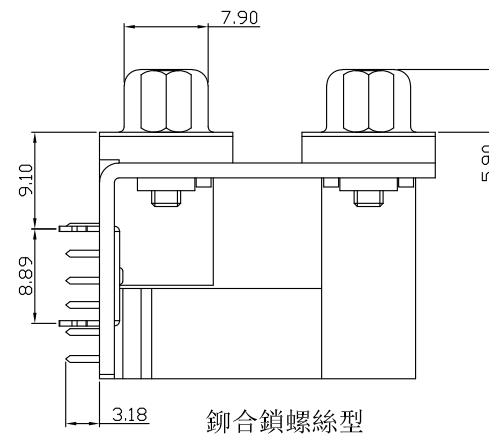
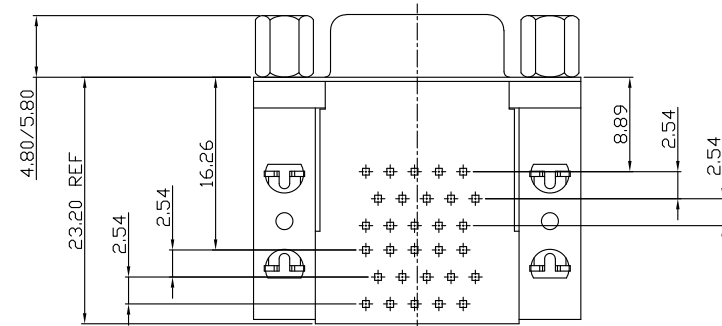


P.C.B. LAYOUT



鉚合鎖螺絲型

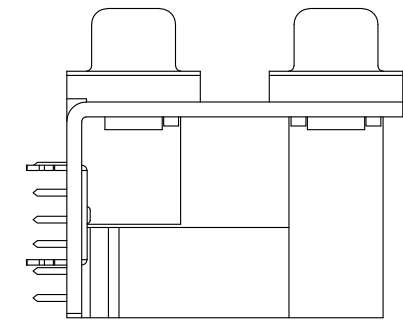

鉚合型

僅供參考

MATERIALS:

1. Housing: PBT (UL 94V-0), Black / Blue
2. Connecting Seat: PA66 (UL 94V-0), Black
3. Contacts: Brass
4. Shell: SPCC
5. Rivet: Copper Alloy(Lead \leq 40000PPM)
6. Board Lock: Brass
7. L Bracket: SPCC
8. Screw: SPCC
Or Copper Alloy(Lead \leq 40000PPM)

FINISH:

1. Contacts: Gold Flash Plated on Contact Area
Tin Plated on Solderails
Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Rivet: Nickel Plated
4. Board Lock: Tin Plated
5. L Bracket: Nickel Plated
6. Screw: Nickel Plated

SPECIFICATION:

1. Current Rating: 2 Amp
2. Dielectric Withstanding Voltage: AC 500V For 1 minute
3. Insulation Resistance: 5000M Ω Min
4. Contact Resistance: 30m Ω Max.
5. Operating Temperature: -55°C to +105°C

XIAN YI PRECISION CO., LTD.
祥益精密股份有限公司

TITLE / 品名: VGA-15P母+VGA-15母(8.89) 90度 疊層 Dip Type (層距19.05)

核準發行章

PART NO / 料號: DC1122-1F1F-RXXXX

APPROVE / 核準	CHECKED / 審查	DRAWING / 繪圖	DRAWING NO / 圖號	UNIT / 單位	☉	☐
<i>Kin</i>	<i>Chenrong</i>	<i>Chenrong</i>	K-2D-009-00	mm		

SHEET 1 OF 1	
--------------	--

NO.	REV / 版本	圖面僅供參考, 實際尺寸以承認圖為主	2025/12/19
		修訂內容	日期