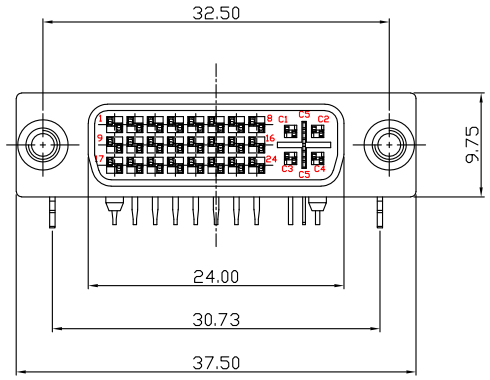

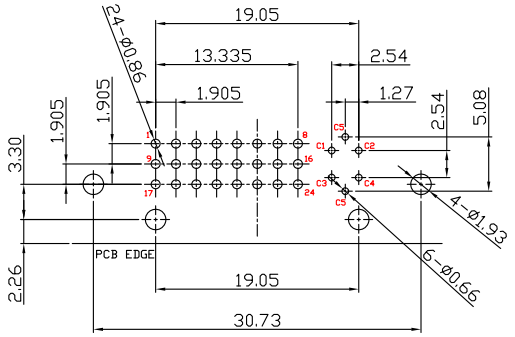

RECOMMENDED PCB LAYOUT

MATERIALS:
1. Housing: PBT / PA66 (UL 94V-0), White / Black
2. Cover: PA66 (UL 94V-0), White / Black
3. Contacts: Brass
4. Shell: SPCC
5. Rivet: Copper Alloy(Lead≦40000PPM)
6. Board Lock: SPCC
7. Screw: SPCC
   Or Copper Alloy(Lead≦40000PPM)

FINISH:
1. Contacts: Gold Flash Plated on Contact Area
   Tin Plated on Soldertails
   Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Rivet: Nickel Plated
4. Board Lock: Tin Plated
5. Screw: Nickel Plated

SPECIFICATION:
1. Current Rating: 1.5 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s. For 60S
3. Insulation Resistance: 1000MΩ Min. at DC 500V For 60S
4. Contact Resistance: 30mΩ Max.
5. Operating Temperature: -20°C to 85°C

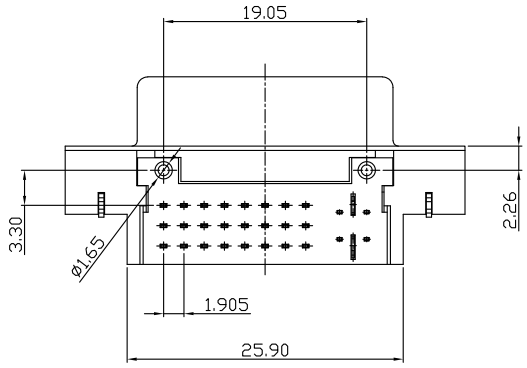





鉚合型



鉚合鎖螺絲型



僅供參考

XIAN YI PRECISION CO., LTD. 祥益精密股份有限公司				TITLE /品名：DVI 90度 母座 (板邊距2.26+3.3) 有柱 DIP Type				核準發行章
				PART NO /料號：D73110-29F-Rxxxx				
APPROVE /核準	CHECKED /審查	DRAWING /繪圖	DRAWING NO /圖號	UNIT /單位				
Xin	*Chenrong*	*Chenrong*	A-0V-004-00	mm	SHEET 1 OF 1			
						NO.	REV /版本	修訂內容	日期
							1.0	圖面僅供參考，實際尺寸以承認圖為主	2025/12/19

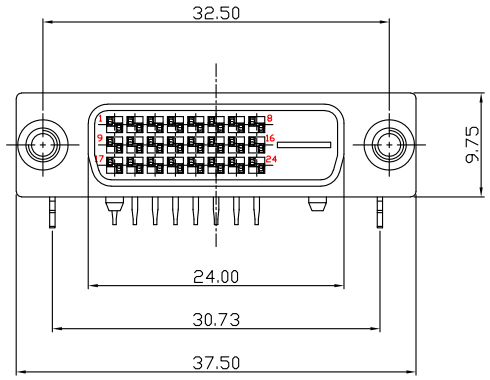

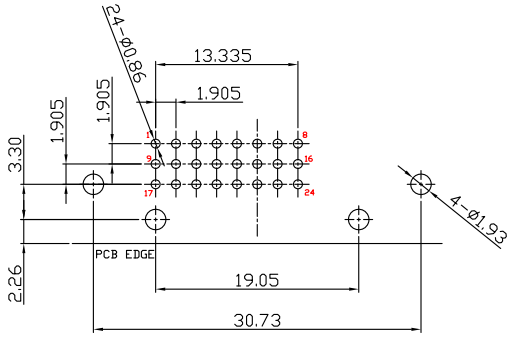

RECOMMENDED PCB LAYOUT

MATERIALS:
1. Housing: PBT / PA66 (UL 94V-0), White / Black
2. Cover: PA66 (UL 94V-0), White / Black
3. Contacts: Brass
4. Shell: SPCC
5. Rivet: Copper Alloy(Lead≦40000PPM)
6. Board Lock: SPCC
7. Screw: SPCC
   Or Copper Alloy(Lead≦40000PPM)

FINISH:
1. Contacts: Gold Flash Plated on Contact Area
   Tin Plated on Soldertails
   Nickel Under Plated Over All
2. Shell: Nickel Plated
3. Rivet: Nickel Plated
4. Board Lock: Tin Plated
5. Screw: Nickel Plated

SPECIFICATION:
1. Current Rating: 1.5 Amp
2. Dielectric Withstanding Voltage: AC 500V r.m.s. For 60S
3. Insulation Resistance: 1000MΩ Min. at DC 500V For 60S
4. Contact Resistance: 30mΩ Max.
5. Operating Temperature: -20°C to 85°C

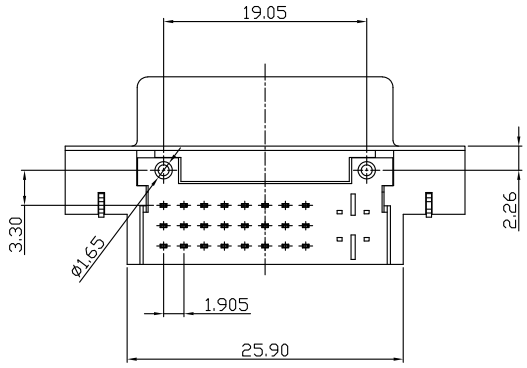





鉚合型



鉚合鎖螺絲型



僅供參考

XIAN YI PRECISION CO., LTD. 祥益精密股份有限公司				TITLE /品名：DVI 90度 母座 (板邊距2.26+3.3) 有柱 DIP Type				核準發行章
				PART NO /料號：D73110-24F-Rxxxx				
APPROVE /核準	CHECKED /審查	DRAWING /繪圖	DRAWING NO /圖號	UNIT /單位				
Xin	Chenrong	Chenrong	A-0V-004-00	mm	SHEET 1 OF 1			
						NO.	REV /版本	修訂內容	日期
							1.0	圖面僅供參考，實際尺寸以承認圖為主	2025/12/19